Pandora Track

PF>0,9 IP20 CE RoHS

Rond track LED armatuur met minimalistisch design. Behuizing gemaakt van gebogen aluminium profiel. 350° draaibaar en 45° kantelbaar. Verkrijgbaar in wit gelakt (RAL 9003) zwart (RAL 9005) of zilver grijs (RAL 9006). Geschikt voor toepassing in onder andere winkelcentra, hotels en kantoren. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round track LED luminaire with minimalistic design. Housing made of aluminium profile painted in white (RAL 9003) black (RAL 9005) or silver grey (RAL 9006). 350° rotatable and 45° tiltable. Suitable for shopping centres, hotels and offices. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / *Micro Prism*

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Diameter (mm)** *Diameter (mm)*	**Hoogte (mm)** *Height (mm)*	**kg** *kg*	**Artikel nr.** *Article no.*	**Dali** *Dali*
26w	3000k	2184	>80	400	82	2,7	26009MPT_.40030	26009MPT_.40032
26w	4000k	2290	>80	400	82	2,7	26009MPT_.40040	26009MPT_.40042

Opaal / *Opal*


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Diameter (mm)** *Diameter (mm)*	**Hoogte (mm)** *Height (mm)*	**kg** *kg*	**Artikel nr.** *Article no.*	**Dali** *Dali*
26w	3000k	2074	>80	400	82	2,7	26009OPT_.40030	26009OPT_.40032
26w	4000k	2175	>80	400	82	2,7	26009OPT_.40040	26009OPT_.40042


* Lichtstroom van armatuur, tolerantie van +/- 10%

_ W=wit / B=zwart / G=grijs


* *Luminaire luminous flux, tolerance of +/- 10%*

_ W=white / B=black / G=grey

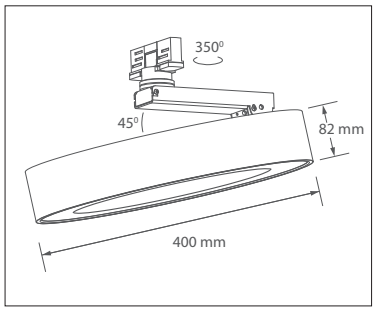







26009.MPT_.40030
26w 3000k 2184lm
ηLB 100%

melis lighting