

Perlopal IP50

IP50 IK02 

LED opbouwarmatuur met opalen kap. Hoog armatuur rendement (>110lm/w). Behuizing gemaakt van UV-bestendig PMMA. Binnenreflector uit wit gelakt plaatstaal. Armatuur wordt gesloten met schuimpakking IP50 en PC schuifklemmen. Kleurweergave CRI>80. Geschikt voor montage op plafonds en muren. Alleen goedgekeurd voor gebruik binnenshuis. Omgevingstemperatuur: -20°C tot + 30°C. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

LED surface-mounted luminaire with opal cover. High luminaire efficiency (>110 lm/w). Housing made from UV-resistant PMMA. Inner reflector made of white painted sheet steel. Luminaire is closed with foam packing IP50 and PC slide clamps. Color rendering CRI>80. Suitable for mounting on ceilings and walls. Only approved for indoor use. Ambient temperature: -20°C to + 30°C. Low maintenance and high life expectancy (50,000 hours L80B10). Color stability, Mac Adam <3. Five-year warranty.

Micro Prisma / Micro Prism


Wattage Wattage	Kleur Colour	Lumen* Lumen*	Lengte Length	Breedte Width	Hoogte Height	Montage gaten Mounting holes	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikelnr. Article no.	Dali Dali
25w	3000k	2995	650	105	87	460	1,3	-	61236.M.25.30	61236.M.25.32
35w	3000k	4750	1260	105	87	900	2,3	3	61236.M.35.30	61236.M.35.32
54w	3000k	6600	1560	105	87	1200	2,7	3	61236.M.54.30	61236.M.54.32
56w	3000k	6650	665	665	92	400	-	3	61236.M.56.30	61236.M.56.32
25w	4000k	3150	650	105	87	460	1,3	-	61236.M.25.40	61236.M.25.42
35w	4000k	5000	1260	105	87	900	2,3	3	61236.M.35.40	61236.M.35.42
54w	4000k	6950	1560	105	87	1200	2,7	3	61236.M.54.40	61236.M.54.42
56w	4000k	7000	665	665	92	400	-	3	61236.M.56.40	61236.M.56.42

Opaal / Opal



Wattage Wattage	Kleur Colour	Lumen* Lumen*	Lengte Length	Breedte Width	Hoogte Height	Montage gaten Mounting holes	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikelnr. Article no.	Dali Dali
25w	3000k	2610	650	105	87	460	1,3	-	61236.OP.25.30	61236.OP.25.32
35w	3000k	4230	1260	105	87	900	2,3	3	61236.OP.35.30	61236.OP.35.32
54w	3000k	5940	1560	105	87	1200	2,7	3	61236.OP.54.30	61236.OP.54.32
56w	3000k	4940	665	665	92	400	-	3	61236..OP56.30	61236.OP.56.32
25w	4000k	2750	650	105	87	460	1,3	-	61236.OP.25.40	61236.OP.25.42
35w	4000k	4450	1260	105	87	900	2,3	3	61236.OP.35.40	61236.OP.35.42
54w	4000k	6250	1560	105	87	1200	2,7	3	61236.OP.54.40	61236.OP.54.42
56w	4000k	5200	665	665	92	400	-	3	61236.OP.56.40	61236.OP.56.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

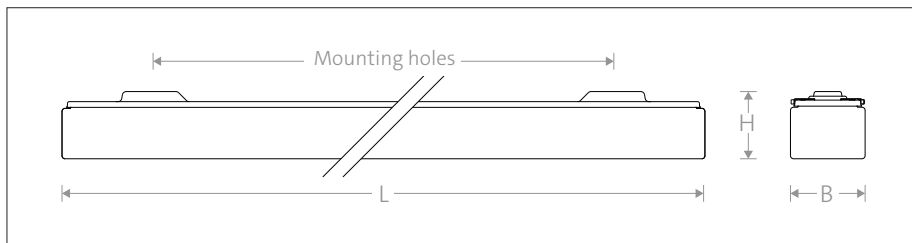

OPBOUW ARMATUREN SURFACE MOUNTED LUMINAIRES

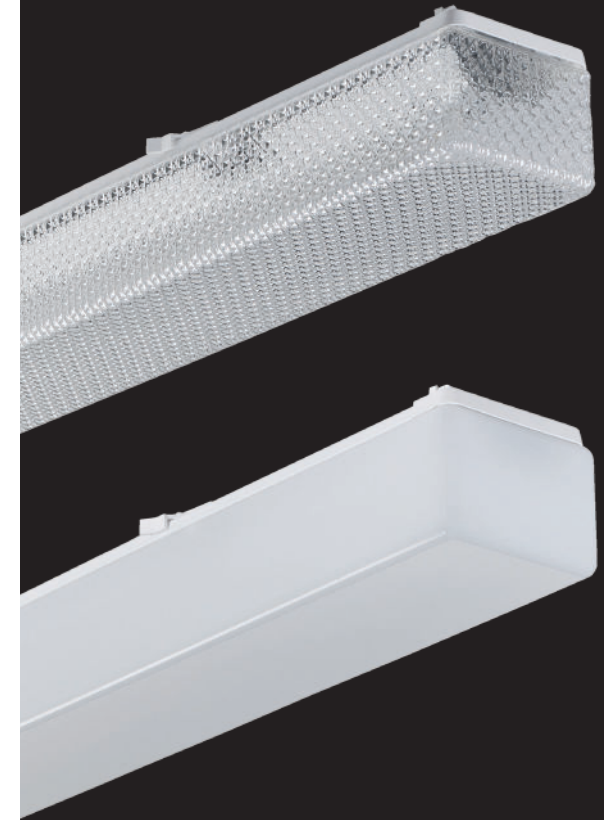

61236.M.25.30
25w 3000K 2995lm
ηLB 100%

melis lighting