





LED armatuur met opalen afscherming speciaal geschikt voor natte ruimtes. Hoog rendement (>110lm/w). Diffuser van dual satin opaal (PMMA). Reflector van wit, glasvezelversterkt polyester, vlamvertragend. Hoogwaardige rondom geschuimde polyurethaanafdichting voor verhoogde beschermingseisen. Uitermate geschikt voor gebruik in binnenruimtes en natte ruimtes, zoals keukens, sanitaire en wellnessruimtes, werkplaatsen, kelder- en hobbyruimtes, entreegebieden, terrassen, tuinhuisjes. Omgevingstemperatuur: -20°C tot + 30°C. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

LED fixture with opal shielding especially suitable for wet areas. High efficiency (>110lm/w). Diffuser of dual satin opal (PMMA). White reflector, fiberglass-reinforced polyester, flame-retardant. High-quality all-round foamed polyurethane seal for increased protection requirements. Extremely suitable for use in indoor areas and wet areas, such as kitchens, sanitary and wellness areas, workshops, cellar and hobby areas, entrance areas, terraces, gazebos. Ambient temperature: -20°C to + 30°C. Low maintenance and high life expectancy (50,000 hours L80B10). Color stability, Mac Adam <3. Five-year warranty.

Wattage Wattage	Kleur Colour	Lumen* Lumen*	Sensor	Lengte Length	Breedte Width	Hoogte Height	Montage gaten Mounting holes	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikelnr. Article no.	Dali Dali
43w	3000k	4655		1260	105	95	740	2,7	3	61235.43.30	61235.43.32
43w	3000k	4655	x	1260	105	95	740	2,7	3	61235.43.30S	61235.43.32S
46w	3000k	5225		1560	105	95	850	3,0	3	61235.46.30	61235.46.32
46w	3000k	5225	x	1560	105	95	850	3,0	3	61235.46.30S	61235.46.32S
43w	4000k	4900		1260	105	95	740	2,7	3	61235.43.40	61235.43.42
43w	4000k	4900	x	1260	105	95	740	2,7	3	61235.43.40S	61235.43.42S
46w	4000k	5500		1560	105	95	850	3,0	3	61235.46.40	61235.46.42
46w	4000k	5500	x	1560	105	95	850	3,0	3	61235.46.40S	61235.46.42S

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

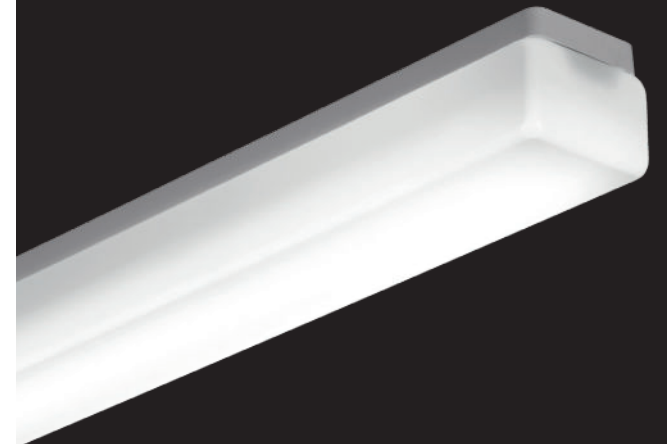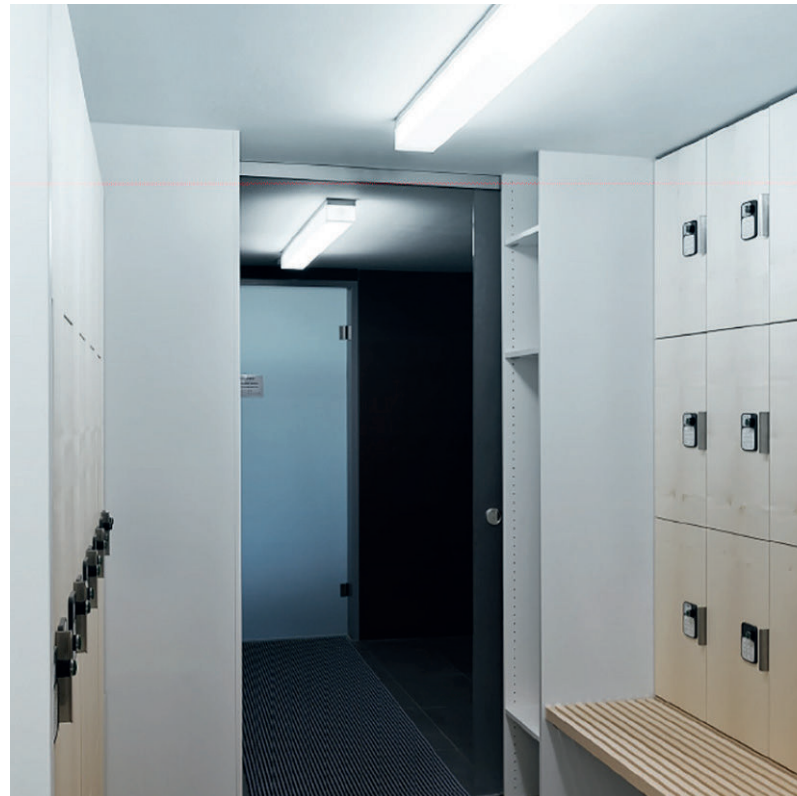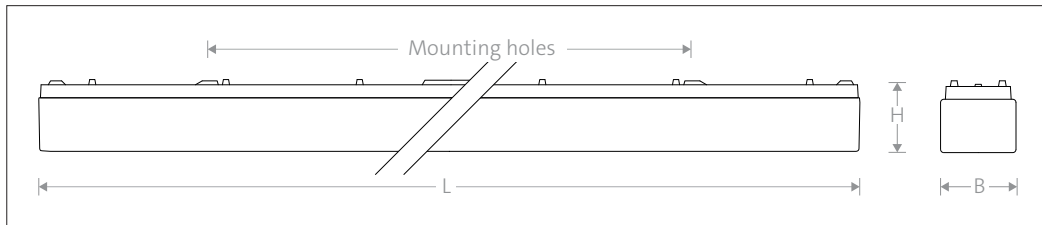


Opties:

- Geïntegreerde bewegingssensor

Options:

- Integrated motionsensor



61235.43.30

43w 3000K 4655lm
ηLB 100%