Pipe HORIZONTAL

PF>0,9 IP40



Elegant en slank LED pendel armatuur. Behuizing gemaakt van geëxtrudeerd aluminium. Voorzien van breedstralende (270°) hoogwaardige opaal diffuser. Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Wordt geleverd inclusief pendel accessoires: staalkabels (1,5m) en snoer (2m). Externe driver in plafondbox. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Elegant slim suspended LED luminaire. Housing made out of extruded aluminium. Equipped with high quality wide angle (270°) opal diffuser. Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Delivered including pendant suspension, steel cables (1,5m) and mains cable (2m). External driver in ceiling box. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Horizontaal / *Horizontal*


Wattage *Watts*	**Kleur** *Colour*	**Lumen** *Lumen*	**Lengte (mm)** *Length (mm)*	**Diameter (mm)** *Diameter (mm)*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
14w	3000k	1805	600	60	0,5	1/3	61341_.14.30	61341_.14.32
20w	3000k	2800	900	60	0,7	1/3	61341_.20.30	61341_.20.32
27w	3000k	3800	1200	60	0,9	1/3	61341_.27.30	61341_.27.32
34w	3000k	4835	1500	60	1,1	1/3	61341_.34.30	61341_.34.32
14w	4000k	1900	600	60	0,5	1/3	61341_.14.40	61341_.14.42
20w	4000k	2950	900	60	0,7	1/3	61341_.20.40	61341_.20.42
27w	4000k	4000	1200	60	0,9	1/3	61341_.27.40	61341_.27.42
34w	4000k	5090	1500	60	1,1	1/3	61341_.34.40	61341_.34.42


* Lichtstroom van armatuur, tolerantie van +/- 10%


* *Luminaire luminous flux, tolerance of +/- 10%*

_ W=wit / B=zwart / G=grijs

_ W=white / B=black / G=grey

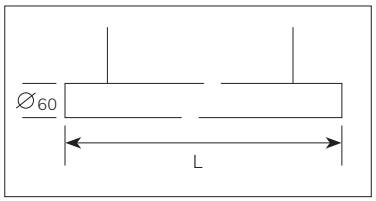

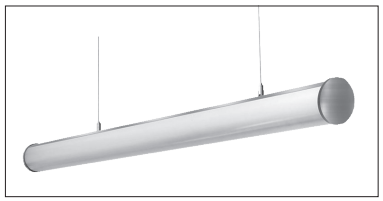



61341_.14.30
14w 3000k 1805lm
ηLB 100%

melis lighting