Pipe VERTICAL

PF>0,9 IP40

Elegant en slank LED pendel armatuur. Behuizing gemaakt van geëxtrudeerd aluminium. Voorzien van breedstralende (360°) hoogwaardige opaal diffuser. Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Wordt geleverd inclusief pendel accessoires: staalkabels (1,5m) en snoer (2m). Externe driver in plafondbox. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Elegant slim suspended LED luminaire. Housing made out of extruded aluminium. Equipped with high quality wide angle (360°) opal diffuser. Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Delivered including pendant suspension, steel cables (1,5m) and mains cable (2m). External driver in ceiling box. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Vertikaal / *Vertical*


Wattage *Watts*	**Kleur** *Colour*	**Lumen** *Lumen*	**Lengte (mm)** *Length (mm)*	**Diameter (mm)** *Diameter (mm)*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
22w	3000k	1800	600	60	0,5	1/3	61342_.22.30	61342_.22.32
32w	3000k	3200	900	60	0,7	1/3	61342_.32.30	61342_.32.32
39w	3000k	4100	1200	60	0,9	1/3	61342_.39.30	61342_.39.32
48w	3000k	5125	1500	60	1,1	1/3	61342_.48.30	61342_.48.32
22w	4000k	1900	600	60	0,5	1/3	61342_.22.40	61342_.22.42
32w	4000k	3360	900	60	0,7	1/3	61342_.32.40	61342_.32.42
39w	4000k	4000	1200	60	0,9	1/3	61342_.39.40	61342_.39.42
48w	4000k	5380	1500	60	1,1	1/3	61342_.48.40	61342_.48.42

* Lichtstroom van armatuur, tolerantie van +/- 10%


* *Luminaire luminous flux, tolerance of +/- 10%*

_ W=wit / B=zwart / G=grijs

_ W=white / B=black / G=grey

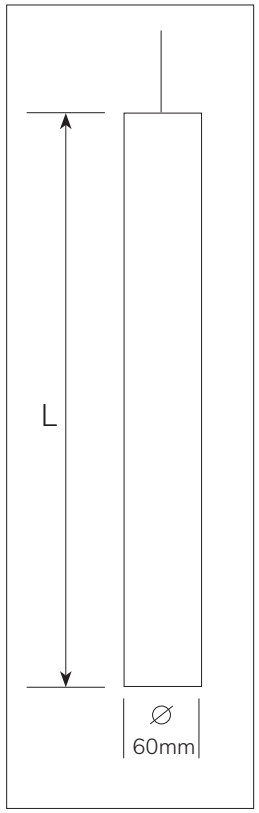





61342_.22.30
22w 3000k 1800lm
ηLB 100%

melis lighting