

Elegant en slank LED pendelarmatuur. Behuizing gemaakt van geëxtrudeerd aluminium. Voorzien van breedstralende (360°) hoogwaardige opaal diffuser. Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Wordt geleverd inclusief pendel accessoires: staalkabels (1,5m) en snoer (2m). Externe driver in plafondbox. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Elegant slim LED pendant. Housing made out of extruded aluminium. Equipped with high quality wide angle (360°) opal diffuser. Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Delivered including pendant suspension, steel cables (1,5m) and mains cable (2m). External driver in ceiling box. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Vertikaal / Vertical



Wattage Watts	Kleur Colour	Lumen Lumen	Lengte (mm) Length (mm)	Diameter (mm) Diameter (mm)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali
13w	3000k	1755	600	60	0,5	1/3	61342_13.30	61342_13.32
20w	3000k	2700	900	60	0,7	1/3	61342_20.30	61342_20.32
27w	3000k	3645	1200	60	0,9	1/3	61342_27.30	61342_27.32
34w	3000k	4590	1500	60	1,1	1/3	61342_34.30	61342_34.32
13w	4000k	1845	600	60	0,5	1/3	61342_13.40	61342_13.42
20w	4000k	2835	900	60	0,7	1/3	61342_20.40	61342_20.42
27w	4000k	3830	1200	60	0,9	1/3	61342_27.40	61342_27.42
34w	4000k	4820	1500	60	1,1	1/3	61342_34.40	61342_34.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

_ W=wit / B=zwart / G=grijs

_ W=white / B=black / G=grey

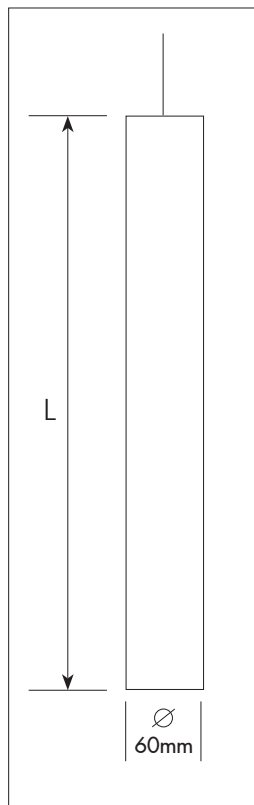

61342_13.30

13w 3000k 1755lm
ηLB 100%