

Pipe Wall



WAND EN PLAFOND WALL AND CEILING

Elegant en slank LED wandarmatuur. Behuizing gemaakt van geëxtrudeerd aluminium. Voorzien van breedstralende (270°) hoogwaardige opaal diffuser. Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Elegant slim surface mounted LED luminaire. Housing made out of extruded aluminium. Equipped with high quality wide angle (270°) opal diffuser. Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.



Wattage Watts	Kleur Colour	Lumen Lumen	Lengte (mm) Length (mm)	Diameter (mm) Diameter (mm)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali
13w	3000k	1805	600	60	0,5	1/3	61340_13.30	61340_13.32
20w	3000k	2800	900	60	0,7	1/3	61340_20.30	61340_20.32
27w	3000k	3800	1200	60	0,9	1/3	61340_27.30	61340_27.32
34w	3000k	4835	1500	60	1,1	1/3	61340_34.30	61340_34.32
13w	4000k	1900	600	60	0,5	1/3	61340_13.40	61340_13.42
20w	4000k	2950	900	60	0,7	1/3	61340_20.40	61340_20.42
27w	4000k	4000	1200	60	0,9	1/3	61340_27.40	61340_27.42
34w	4000k	5090	1500	60	1,1	1/3	61340_34.40	61340_34.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

_ W=wit / B=zwart / G=grijs

_ W=white / B=black / G=grey

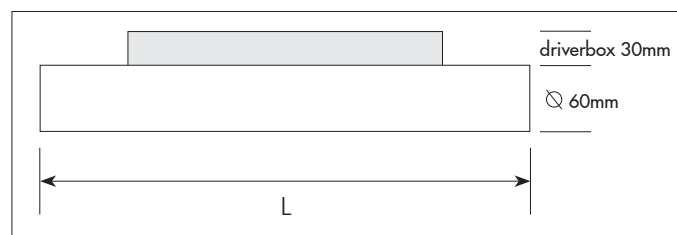

61340_13.30

13w 3000k 1805lm
ηLB 100%

melis lighting