Pipe Wall

PF>0,9 IP40 RoHS

Elegant en slank LED wandarmatuur. Behuizing gemaakt van geëxtrudeerd aluminium. Voorzien van breedstralende (270°) hoogwaardige opaal diffuser. Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Elegant slim surface mounted LED luminaire. Housing made out of extruded aluminium. Equipped with high quality wide angle (270°) opal diffuser. Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.


Wattage *Watts*	**Kleur** *Colour*	**Lumen** *Lumen*	**Lengte (mm)** *Length (mm)*	**Diameter (mm)** *Diameter (mm)*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
14w	3000k	1805	600	60	0,5	1/3	61340_.14.30	61340_.14.32
20w	3000k	2800	900	60	0,7	1/3	61340_.20.30	61340_.20.32
27w	3000k	3800	1200	60	0,9	1/3	61340_.27.30	61340_.27.32
34w	3000k	4835	1500	60	1,1	1/3	61340_.34.30	61340_.34.32
14w	4000k	1900	600	60	0,5	1/3	61340_.14.40	61340_.14.42
20w	4000k	2950	900	60	0,7	1/3	61340_.20.40	61340_.20.42
27w	4000k	4000	1200	60	0,9	1/3	61340_.27.40	61340_.27.42
34w	4000k	5090	1500	60	1,1	1/3	61340_.34.40	61340_.34.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

_ W=wit / B=zwart / G=grijs


* *Luminaire luminous flux, tolerance of +/- 10%*

_ W=white / B=black / G=grey

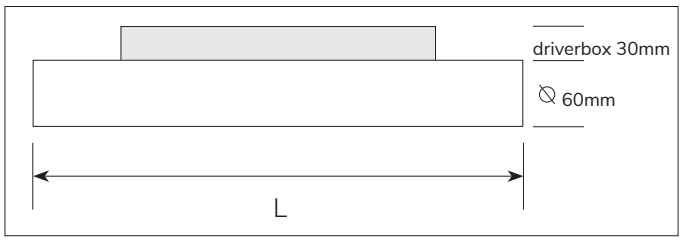







61340_.14.30
14w 3000k 1805lm
ηLB 100%

melis lighting