Plane GRID SURFACE WHITE

PF>0,95 IP40


Elegant en slank LED armatuur. Vervaardigd uit wit gelakt (RAL 9003) plaatstaal met UV-bestendige PC plastic kommen (UGR<17). Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Elegant slim LED armature. Housing made of white painted (RAL 9003) sheet metal with UV-resistant PC plastic bowls (UGR<17). Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.


Wattage *Watts*	**Kleur** *Colour*	**Lumen** *Lumen*	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
11w	3000k	1435	565	43	59	1,63	1/3	61484W.11.30D	61484W.11.32D
15w	3000k	2050	565	43	59	1,63	1/3	61484W.15.30D	61484W.15.32D
16w	3000k	2163	845	43	59	2,45	1/3	61484W.16.30D	61484W.16.32D
22w	3000k	3090	845	43	59	2,45	1/3	61484W.22.30D	61484W.22.32D
21w	3000k	2954	1125	43	59	3,25	1/3	61484W.21.30D	61484W.21.32D
30w	3000k	4220	1125	43	59	3,25	1/3	61484W.30.30D	61484W.30.32D
26w	3000k	3636	1405	43	59	4,00	1/3	61484W.26.30D	61484W.26.32D
37w	3000k	5195	1405	43	59	4,00	1/3	61484W.37.30D	61484W.37.32D
11w	4000k	1512	565	43	59	1,63	1/3	61484W.11.40D	61484W.11.42D
15w	4000k	2160	565	43	59	1,63	1/3	61484W.15.40D	61484W.15.42D
16w	4000k	2275	845	43	59	2,45	1/3	61484W.16.40D	61484W.16.42D
22w	4000k	3250	845	43	59	2,45	1/3	61484W.22.40D	61484W.22.42D
21w	4000k	3108	1125	43	59	3,25	1/3	61484W.21.40D	61484W.21.42D
30w	4000k	4440	1125	43	59	3,25	1/3	61484W.30.40D	61484W.30.42D
26w	4000k	3829	1405	43	59	4,00	1/3	61484W.26.40D	61484W.26.42D
37w	4000k	5470	1405	43	59	4,00	1/3	61484W.37.40D	61484W.37.42D

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

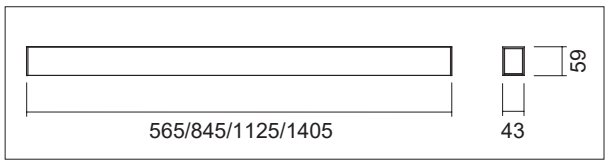

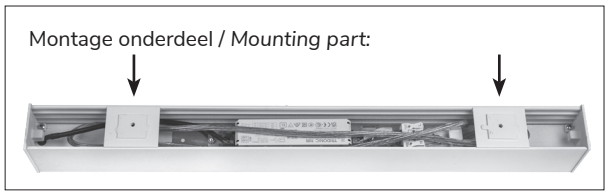


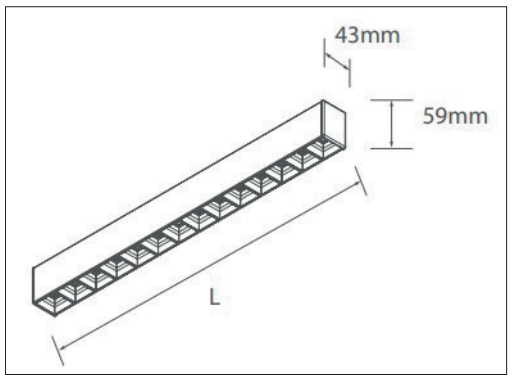

OPBOUW ARMATUREN

SURFACE MOUNTED LUMINAIRES





61484W.15.30D
15w 3000k 2050lm
ηLB 100%

melis lighting