Plane GRID SUSPENDED UP/DOWN BLACK

PF>0,95 IP40


Elegant en slank LED pendel armatuur met directe/indirecte lichtbundel. Vervaardigd uit zwart gelakt (RAL 9005) plaatstaal met UV-bestendige PC plastic kommen (UGR<17). Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Wordt geleverd inclusief pendel accessoires: staalkabels (3m) en snoer (3,5m). Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Elegant and slim suspended LED luminaire with direct/indirect beam angle. Housing made of black painted (RAL 9005) sheet metal with UV-resistant PC plastic bowls (UGR<17). Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Delivered including pendant suspension, steel cables (3m) and mains cable (3,5m). Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.


Wattage *Watts*	**Kleur** *Colour*	**Lumen** *Lumen*	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
11w+4w	3000k	1824	565	43	59	1,63	1/3	61485B.11.30DI	61485B.11.32DI
15w+6w	3000k	2554	565	43	59	1,63	1/3	61485B.15.30DI	61485B.15.32DI
16w+6w	3000k	2675	845	43	59	2,45	1/3	61485B.16.30DI	61485B.16.32DI
22w+9w	3000k	3770	845	43	59	2,45	1/3	61485B.22.30DI	61485B.22.32DI
21w+8w	3000k	3526	1125	43	59	3,25	1/3	61485B.21.30DI	61485B.21.32DI
30w+12w	3000k	5107	1125	43	59	3,25	1/3	61485B.30.30DI	61485B.30.32DI
26w+11w	3000k	4499	1405	43	59	4,00	1/3	61485B.26.30DI	61485B.26.32DI
37w+15w	3000k	6323	1405	43	59	4,00	1/3	61485B.37.30DI	61485B.37.32DI
11w+4w	4000k	1920	565	43	59	1,63	1/3	61485B.11.40DI	61485B.11.42DI
15w+6w	4000k	2688	565	43	59	1,63	1/3	61485B.15.40DI	61485B.15.42DI
16w+6w	4000k	2816	845	43	59	2,45	1/3	61485B.16.40DI	61485B.16.42DI
22w+9w	4000k	3968	845	43	59	2,45	1/3	61485B.22.40DI	61485B.22.42DI
21w+8w	4000k	3712	1125	43	59	3,25	1/3	61485B.21.40DI	61485B.21.42DI
30w+12w	4000k	5376	1125	43	59	3,25	1/3	61485B.30.40DI	61485B.30.42DI
26w+11w	4000k	4736	1405	43	59	4,00	1/3	61485B.26.40DI	61485B.26.42DI
37w+15w	4000k	6656	1405	43	59	4,00	1/3	61485B.37.40DI	61485B.37.42DI

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

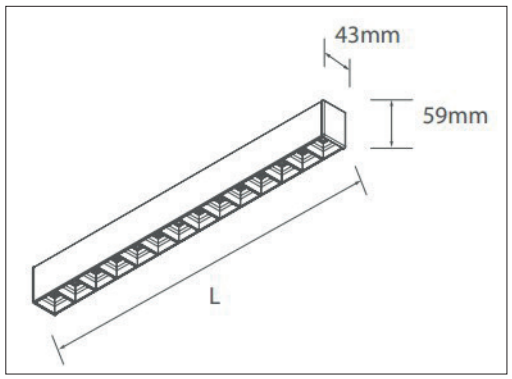

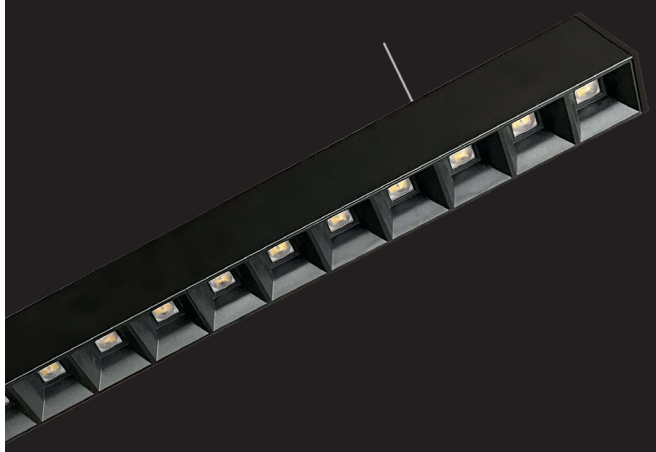



61485B.15.30DI
15w+6w 3000k 2554lm
ηLB 100%

melis lighting