Plane GRID SUSPENDED WHITE

PF>0,95 IP40


Elegant en slank LED pendel armatuur. Vervaardigd uit wit gelakt (RAL 9003) plaatstaal met UV-bestendige PC plastic kommen (UGR<17). Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Wordt geleverd inclusief pendel accessoires: staalkabels (3m) en snoer (3,5m). Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Elegant and slim suspended LED luminaire. Housing made of white painted (RAL 9003) sheet metal with UV-resistant PC plastic bowls (UGR<17). Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Delivered including pendant suspension, steel cables (3m) and mains cable (3,5m). Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.


Wattage *Watts*	**Kleur** *Colour*	**Lumen** *Lumen*	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
11w	3000k	1435	565	43	59	1,63	1/3	61485W.11.30D	61485W.11.32D
15w	3000k	2050	565	43	59	1,63	1/3	61485W.15.30D	61485W.15.32D
16w	3000k	2163	845	43	59	2,45	1/3	61485W.16.30D	61485W.16.32D
22w	3000k	3090	845	43	59	2,45	1/3	61485W.22.30D	61485W.22.32D
21w	3000k	2954	1125	43	59	3,25	1/3	61485W.21.30D	61485W.21.32D
30w	3000k	4220	1125	43	59	3,25	1/3	61485W.30.30D	61485W.30.32D
26w	3000k	3636	1405	43	59	4,00	1/3	61485W.26.30D	61485W.26.32D
37w	3000k	5195	1405	43	59	4,00	1/3	61485W.37.30D	61485W.37.32D
11w	4000k	1512	565	43	59	1,63	1/3	61485W.11.40D	61485W.11.42D
15w	4000k	2160	565	43	59	1,63	1/3	61485W.15.40D	61485W.15.42D
16w	4000k	2275	845	43	59	2,45	1/3	61485W.16.40D	61485W.16.42D
22w	4000k	3250	845	43	59	2,45	1/3	61485W.22.40D	61485W.22.42D
21w	4000k	3108	1125	43	59	3,25	1/3	61485W.21.40D	61485W.21.42D
30w	4000k	4440	1125	43	59	3,25	1/3	61485W.30.40D	61485W.30.42D
26w	4000k	3829	1405	43	59	4,00	1/3	61485W.26.40D	61485W.26.42D
37w	4000k	5470	1405	43	59	4,00	1/3	61485W.37.40D	61485W.37.42D

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

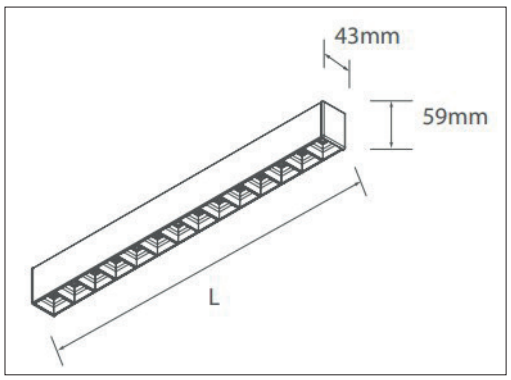

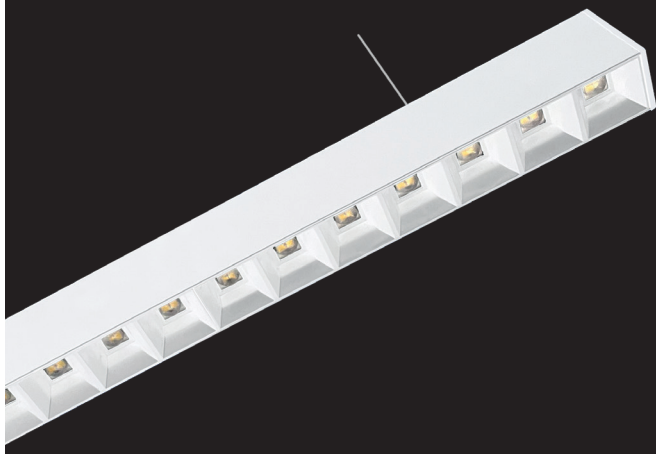



61485W.15.30D
15w 3000k 2050lm
ηLB 100%

melis lighting