Plane Wall BLACK UP/DOWN

PF>0,9 IP40

Elegant en slank LED wandarmatuur met directe/indirecte lichtbundel. Behuizing gemaakt van geëxtrudeerd aluminium. Voorzien van breedstralende (>94°) hoogwaardig Micro Prisma diffuser (UGR<19). Wordt geleverd inclusief wandbeugel. Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Elegant slim wallmounted LED luminaire with direct/indirect beam angle. Housing made out of extruded aluminium. Equipped with high quality wide angle (>94°) Micro Prisma diffuser (UGR<19). Comes with a wall bracket. Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / *Micro Prism*

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
14w+13w	3000k	1610+1495	600	50	59	0,9	1/3	61039BM.1430DI	61039BM.1432DI	61039BM.1437DI
20w+13w	3000k	2300+1495	600	50	59	0,9	1/3	61039BM.2030DI	61039BM.2032DI	61039BM.2037DI
21w+20w	3000k	2415+2300	900	50	59	1,3	1/3	61039BM.2130DI	61039BM.2132DI	61039BM.2137DI
30w+20w	3000k	3450+2300	900	50	59	1,3	1/3	61039BM.3030DI	61039BM.3032DI	61039BM.3037DI
27w+26w	3000k	3105+2990	1200	50	59	1,7	1/3	61039BM.2730DI	61039BM.2732DI	61039BM.2737DI
39w+26w	3000k	4485+2990	1200	50	59	1,7	1/3	61039BM.3930DI	61039BM.3932DI	61039BM.3937DI
34w+32w	3000k	3910+3680	1500	50	59	2,1	1/3	61039BM.3430DI	61039BM.3432DI	61039BM.3437DI
49w+32w	3000k	5635+3680	1500	50	59	2,1	1/3	61039BM.4930DI	61039BM.4932DI	61039BM.4937DI
41w+38w	3000k	4715+4370	1800	50	59	2,5	1/3	61039BM.4130DI	61039BM.4132DI	61039BM.4137DI
59w+38w	3000k	6785+4370	1800	50	59	2,5	1/3	61039BM.5930DI	61039BM.5932DI	61039BM.5937DI
48w+44w	3000k	5520+5060	2100	50	59	3,0	1/3	61039BM.4830DI	61039BM.4832DI	61039BM.4837DI
69w+44w	3000k	7935+5060	2100	50	59	3,0	1/3	61039BM.6930DI	61039BM.6932DI	61039BM.6937DI
55w+50w	3000k	6325+5750	2400	50	59	3,4	1/3	61039BM.5530DI	61039BM.5532DI	61039BM.5537DI
79w+50w	3000k	9085+5750	2400	50	59	3,4	1/3	61039BM.7930DI	61039BM.7932DI	61039BM.7937DI
14w+13w	4000k	1680+1560	600	50	59	0,9	1/3	61039BM.1440DI	61039BM.1442DI	61039BM.1447DI
20w+13w	4000k	2400+1560	600	50	59	0,9	1/3	61039BM.2040DI	61039BM.2042DI	61039BM.2047DI
21w+20w	4000k	2520+2400	900	50	59	1,3	1/3	61039BM.2140DI	61039BM.2142DI	61039BM.2147DI
30w+20w	4000k	3600+2400	900	50	59	1,3	1/3	61039BM.3040DI	61039BM.3042DI	61039BM.3047DI
27w+26w	4000k	3240+3120	1200	50	59	1,7	1/3	61039BM.2740DI	61039BM.2742DI	61039BM.2747DI
39w+26w	4000k	4680+3120	1200	50	59	1,7	1/3	61039BM.3940DI	61039BM.3942DI	61039BM.3947DI
34w+32w	4000k	4080+3840	1500	50	59	2,1	1/3	61039BM.3440DI	61039BM.3442DI	61039BM.3447DI
49w+32w	4000k	5880+3840	1500	50	59	2,1	1/3	61039BM.4940DI	61039BM.4942DI	61039BM.4947DI
41w+38w	4000k	4920+4560	1800	50	59	2,5	1/3	61039BM.4140DI	61039BM.4142DI	61039BM.4147DI
59w+38w	4000k	7080+4560	1800	50	59	2,5	1/3	61039BM.5940DI	61039BM.5942DI	61039BM.5947DI
48w+44w	4000k	5760+5280	2100	50	59	3,0	1/3	61039BM.4840DI	61039BM.4842DI	61039BM.4847DI
69w+44w	4000k	8280+5280	2100	50	59	3,0	1/3	61039BM.6940DI	61039BM.6942DI	61039BM.6947DI
55w+50w	4000k	6600+6000	2400	50	59	3,4	1/3	61039BM.5540DI	61039BM.5542DI	61039BM.5547DI
79w+50w	4000k	9480+6000	2400	50	59	3,4	1/3	61039BM.7940DI	61039BM.7942DI	61039BM.7947DI

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

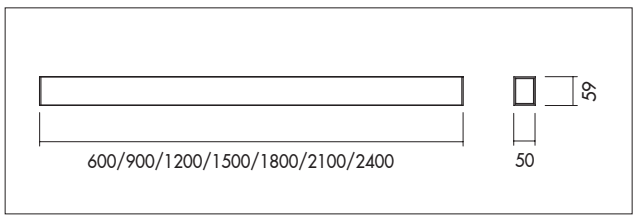


WAND EN PLAFOND *WALL AND CEILING*



Opties:
- Geïntegreerde bewegingssensor
- Corridor functie
- EasySense-sensor

Options:
- *Integrated motionsensor*
- *Corridor function*
- *EasySense-sensor*



61039BM.1430DI
14w+13w 3000k 1610+1495lm
ηLB 100%

melis lighting

Plane Wall BLACK UP/DOWN


Opaal / Opal

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
14w+13w	3000k	1530+1420	600	50	59	0,9	1/3	61039BP.1430DI	61039BP.1432DI	61039BP.1437DI
20w+13w	3000k	2185+1420	600	50	59	0,9	1/3	61039BP.2030DI	61039BP.2032DI	61039BP.2037DI
21w+20w	3000k	2295+2185	900	50	59	1,3	1/3	61039BP.2130DI	61039BP.2132DI	61039BP.2137DI
30w+20w	3000k	3280+2185	900	50	59	1,3	1/3	61039BP.3030DI	61039BP.3032DI	61039BP.3037DI
27w+26w	3000k	2950+2840	1200	50	59	1,7	1/3	61039BP.2730DI	61039BP.2732DI	61039BP.2737DI
39w+26w	3000k	4260+2840	1200	50	59	1,7	1/3	61039BP.3930DI	61039BP.3932DI	61039BP.3937DI
34w+32w	3000k	3715+3495	1500	50	59	2,1	1/3	61039BP.3430DI	61039BP.3432DI	61039BP.3437DI
49w+32w	3000k	5355+3495	1500	50	59	2,1	1/3	61039BP.4930DI	61039BP.4932DI	61039BP.4937DI
41w+38w	3000k	4480+4150	1800	50	59	2,5	1/3	61039BP.4130DI	61039BP.4132DI	61039BP.4137DI
59w+38w	3000k	6445+4150	1800	50	59	2,5	1/3	61039BP.5930DI	61039BP.5932DI	61039BP.5937DI
48w+44w	3000k	5245+4810	2100	50	59	3,0	1/3	61039BP.4830DI	61039BP.4832DI	61039BP.4837DI
69w+44w	3000k	7540+4810	2100	50	59	3,0	1/3	61039BP.6930DI	61039BP.6932DI	61039BP.6937DI
55w+50w	3000k	6010+5460	2400	50	59	3,4	1/3	61039BP.5530DI	61039BP.5532DI	61039BP.5537DI
79w+50w	3000k	8630+5460	2400	50	59	3,4	1/3	61039BP.7930DI	61039BP.7932DI	61039BP.7937DI
14w+13w	4000k	1595+1480	600	50	59	0,9	1/3	61039BP.1440DI	61039BP.1442DI	61039BP.1447DI
20w+13w	4000k	2280+1480	600	50	59	0,9	1/3	61039BP.2040DI	61039BP.2042DI	61039BP.2047DI
21w+20w	4000k	2395+2280	900	50	59	1,3	1/3	61039BP.2140DI	61039BP.2142DI	61039BP.2147DI
30w+20w	4000k	3420+2280	900	50	59	1,3	1/3	61039BP.3040DI	61039BP.3042DI	61039BP.3047DI
27w+26w	4000k	3080+2965	1200	50	59	1,7	1/3	61039BP.2740DI	61039BP.2742DI	61039BP.2747DI
39w+26w	4000k	4445+2965	1200	50	59	1,7	1/3	61039BP.3940DI	61039BP.3942DI	61039BP.3947DI
34w+32w	4000k	3875+3650	1500	50	59	2,1	1/3	61039BP.3440DI	61039BP.3442DI	61039BP.3447DI
49w+32w	4000k	5585+3650	1500	50	59	2,1	1/3	61039BP.4940DI	61039BP.4942DI	61039BP.4947DI
41w+38w	4000k	4675+4330	1800	50	59	2,5	1/3	61039BP.4140DI	61039BP.4142DI	61039BP.4147DI
59w+38w	4000k	6725+4330	1800	50	59	2,5	1/3	61039BP.5940DI	61039BP.5942DI	61039BP.5947DI
48w+44w	4000k	5470+5015	2100	50	59	3,0	1/3	61039BP.4840DI	61039BP.4842DI	61039BP.4847DI
69w+44w	4000k	7865+5015	2100	50	59	3,0	1/3	61039BP.6940DI	61039BP.6942DI	61039BP.6947DI
55w+50w	4000k	6270+5700	2400	50	59	3,4	1/3	61039BP.5540DI	61039BP.5542DI	61039BP.5547DI
79w+50w	4000k	9005+5700	2400	50	59	3,4	1/3	61039BP.7940DI	61039BP.7942DI	61039BP.7947DI


* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

Standard: *Wall Bracket*



Optional: Bracket Box Black
61039B.box

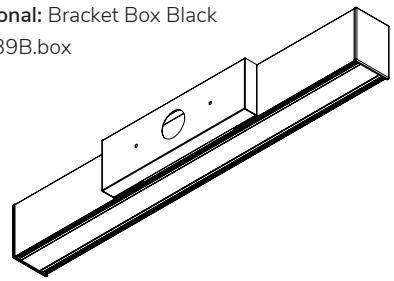

Can also be used reversible.

