Plane WHITE SUSPENDED UP/DOWN

PF>0,9 IP40

Elegant en slank LED pendel armatuur met directe/indirecte lichtbundel. Behuizing gemaakt van geëxtrudeerd aluminium. Voorzien van breedstralende (>94°) hoogwaardig Micro Prisma diffuser (UGR<19). Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Wordt geleverd inclusief pendel accessoires: staalkabels (3m) en snoer (3,5m). Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Elegant and slim suspended LED luminaire with direct/indirect beam angle. Housing made out of extruded aluminium. Equipped with high quality wide angle (>94°) Micro Prisma diffuser (UGR<19). Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Delivered including pendant suspension, steel cables (3m) and mains cable (3,5m). Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / *Micro Prism*

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
14w+13w	3000k	1610+1495	600	50	59	0,9	1/3	61018WM.1430DI	61018WM.1432DI	61018WM.1437DI
20w+13w	3000k	2300+1495	600	50	59	0,9	1/3	61018WM.2030DI	61018WM.2032DI	61018WM.2037DI
21w+20w	3000k	2415+2300	900	50	59	1,3	1/3	61018WM.2130DI	61018WM.2132DI	61018WM.2137DI
30w+20w	3000k	3450+2300	900	50	59	1,3	1/3	61018WM.3030DI	61018WM.3032DI	61018WM.3037DI
27w+26w	3000k	3105+2990	1200	50	59	1,7	1/3	61018WM.2730DI	61018WM.2732DI	61018WM.2737DI
39w+26w	3000k	4485+2990	1200	50	59	1,7	1/3	61018WM.3930DI	61018WM.3932DI	61018WM.3937DI
34w+32w	3000k	3910+3680	1500	50	59	2,1	1/3	61018WM.3430DI	61018WM.3432DI	61018WM.3437DI
49w+32w	3000k	5635+3680	1500	50	59	2,1	1/3	61018WM.4930DI	61018WM.4932DI	61018WM.4937DI
41w+38w	3000k	4715+4370	1800	50	59	2,5	1/3	61018WM.4130DI	61018WM.4132DI	61018WM.4137DI
59w+38w	3000k	6785+4370	1800	50	59	2,5	1/3	61018WM.5930DI	61018WM.5932DI	61018WM.5937DI
48w+44w	3000k	5520+5060	2100	50	59	3,0	1/3	61018WM.4830DI	61018WM.4832DI	61018WM.4837DI
69w+44w	3000k	7935+5060	2100	50	59	3,0	1/3	61018WM.6930DI	61018WM.6932DI	61018WM.6937DI
55w+50w	3000k	6325+5750	2400	50	59	3,4	1/3	61018WM.5530DI	61018WM.5532DI	61018WM.5537DI
79w+50w	3000k	9085+5750	2400	50	59	3,4	1/3	61018WM.7930DI	61018WM.7932DI	61018WM.7937DI
14w+13w	4000k	1680+1560	600	50	59	0,9	1/3	61018WM.1440DI	61018WM.1442DI	61018WM.1447DI
20w+13w	4000k	2400+1560	600	50	59	0,9	1/3	61018WM.2040DI	61018WM.2042DI	61018WM.2047DI
21w+20w	4000k	2520+2400	900	50	59	1,3	1/3	61018WM.2140DI	61018WM.2142DI	61018WM.2147DI
30w+20w	4000k	3600+2400	900	50	59	1,3	1/3	61018WM.3040DI	61018WM.3042DI	61018WM.3047DI
27w+26w	4000k	3240+3120	1200	50	59	1,7	1/3	61018WM.2740DI	61018WM.2742DI	61018WM.2747DI
39w+26w	4000k	4680+3120	1200	50	59	1,7	1/3	61018WM.3940DI	61018WM.3942DI	61018WM.3947DI
34w+32w	4000k	4080+3840	1500	50	59	2,1	1/3	61018WM.3440DI	61018WM.3442DI	61018WM.3447DI
49w+32w	4000k	5880+3840	1500	50	59	2,1	1/3	61018WM.4940DI	61018WM.4942DI	61018WM.4947DI
41w+38w	4000k	4920+4560	1800	50	59	2,5	1/3	61018WM.4140DI	61018WM.4142DI	61018WM.4147DI
59w+38w	4000k	7080+4560	1800	50	59	2,5	1/3	61018WM.5940DI	61018WM.5942DI	61018WM.5947DI
48w+44w	4000k	5760+5280	2100	50	59	3,0	1/3	61018WM.4840DI	61018WM.4842DI	61018WM.4847DI
69w+44w	4000k	8280+5280	2100	50	59	3,0	1/3	61018WM.6940DI	61018WM.6942DI	61018WM.6947DI
55w+50w	4000k	6600+6000	2400	50	59	3,4	1/3	61018WM.5540DI	61018WM.5542DI	61018WM.5547DI
79w+50w	4000k	9480+6000	2400	50	59	3,4	1/3	61018WM.7940DI	61018WM.7942DI	61018WM.7947DI

* Lichtstroom van armatuur, tolerantie van +/- 10%


* *Luminaire luminous flux, tolerance of +/- 10%*

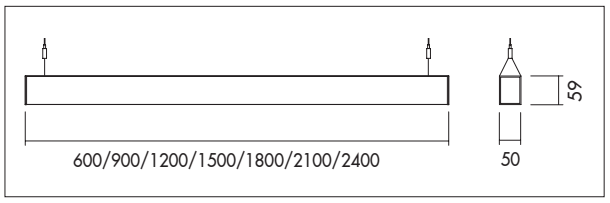




Opties:
- Geïntegreerde bewegingssensor
- Corridor functie
- EasySense-sensor

Options:
- *Integrated motionsensor*
- *Corridor function*
- *EasySense-sensor*

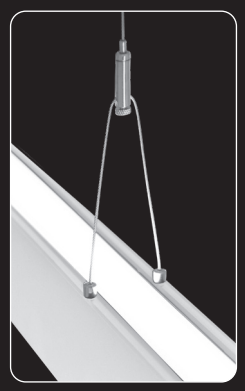



61018WM.1430DI
14w+13w 3000k 1610+1495 lm
ηLB 100%

melis lighting

Plane WHITE SUSPENDED UP/DOWN

Opaal / *Opal*

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
14w+13w	3000k	1530+1420	600	50	59	0,9	1/3	61018WP.1430DI	61018WP.1432DI	61018WP.1437DI
20w+13w	3000k	2185+1420	600	50	59	0,9	1/3	61018WP.2030DI	61018WP.2032DI	61018WP.2037DI
21w+20w	3000k	2295+2185	900	50	59	1,3	1/3	61018WP.2130DI	61018WP.2132DI	61018WP.2137DI
30w+20w	3000k	3280+2185	900	50	59	1,3	1/3	61018WP.3030DI	61018WP.3032DI	61018WP.3037DI
27w+26w	3000k	2950+2840	1200	50	59	1,7	1/3	61018WP.2730DI	61018WP.2732DI	61018WP.2737DI
39w+26w	3000k	4260+2840	1200	50	59	1,7	1/3	61018WP.3930DI	61018WP.3932DI	61018WP.3937DI
34w+32w	3000k	3715+3495	1500	50	59	2,1	1/3	61018WP.3430DI	61018WP.3432DI	61018WP.3437DI
49w+32w	3000k	5355+3495	1500	50	59	2,1	1/3	61018WP.4930DI	61018WP.4932DI	61018WP.4937DI
41w+38w	3000k	4480+4150	1800	50	59	2,5	1/3	61018WP.4130DI	61018WP.4132DI	61018WP.4137DI
59w+38w	3000k	6445+4150	1800	50	59	2,5	1/3	61018WP.5930DI	61018WP.5932DI	61018WP.5937DI
48w+44w	3000k	5245+4810	2100	50	59	3,0	1/3	61018WP.4830DI	61018WP.4832DI	61018WP.4837DI
69w+44w	3000k	7540+4810	2100	50	59	3,0	1/3	61018WP.6930DI	61018WP.6932DI	61018WP.6937DI
55w+50w	3000k	6010+5460	2400	50	59	3,4	1/3	61018WP.5530DI	61018WP.5532DI	61018WP.5537DI
79w+50w	3000k	8630+5460	2400	50	59	3,4	1/3	61018WP.7930DI	61018WP.7932DI	61018WP.7937DI
14w+13w	4000k	1595+1480	600	50	59	0,9	1/3	61018WP.1440DI	61018WP.1442DI	61018WP.1447DI
20w+13w	4000k	2280+1480	600	50	59	0,9	1/3	61018WP.2040DI	61018WP.2042DI	61018WP.2047DI
21w+20w	4000k	2395+2280	900	50	59	1,3	1/3	61018WP.2140DI	61018WP.2142DI	61018WP.2147DI
30w+20w	4000k	3420+2280	900	50	59	1,3	1/3	61018WP.3040DI	61018WP.3042DI	61018WP.3047DI
27w+26w	4000k	3080+2965	1200	50	59	1,7	1/3	61018WP.2740DI	61018WP.2742DI	61018WP.2747DI
39w+26w	4000k	4445+2965	1200	50	59	1,7	1/3	61018WP.3940DI	61018WP.3942DI	61018WP.3947DI
34w+32w	4000k	3875+3650	1500	50	59	2,1	1/3	61018WP.3440DI	61018WP.3442DI	61018WP.3447DI
49w+32w	4000k	5585+3650	1500	50	59	2,1	1/3	61018WP.4940DI	61018WP.4942DI	61018WP.4947DI
41w+38w	4000k	4675+4330	1800	50	59	2,5	1/3	61018WP.4140DI	61018WP.4142DI	61018WP.4147DI
59w+38w	4000k	6725+4330	1800	50	59	2,5	1/3	61018WP.5940DI	61018WP.5942DI	61018WP.5947DI
48w+44w	4000k	5470+5015	2100	50	59	3,0	1/3	61018WP.4840DI	61018WP.4842DI	61018WP.4847DI
69w+44w	4000k	7865+5015	2100	50	59	3,0	1/3	61018WP.6940DI	61018WP.6942DI	61018WP.6947DI
55w+50w	4000k	6270+5700	2400	50	59	3,4	1/3	61018WP.5540DI	61018WP.5542DI	61018WP.5547DI
79w+50w	4000k	9005+5700	2400	50	59	3,4	1/3	61018WP.7940DI	61018WP.7942DI	61018WP.7947DI

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*