








































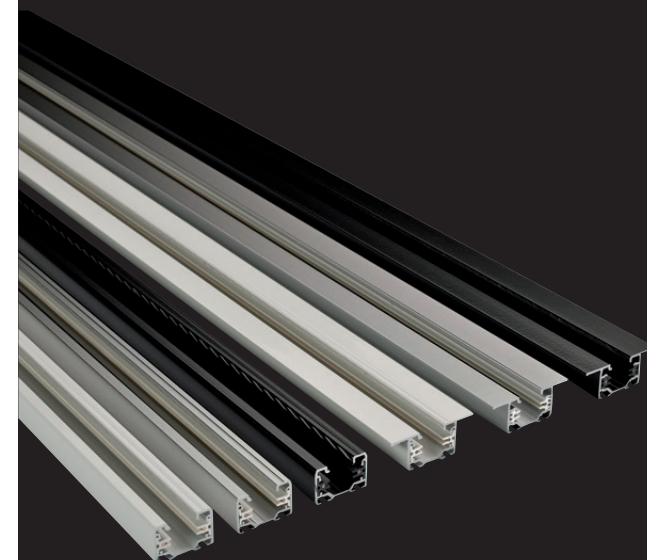


Opbouw railsystemen zijn uitermate geschikt voor het gebruik in winkels, galeriën en musea. Door het modulaire ontwerp kan later eenvoudig de positie van armaturen worden veranderd. Standaard wordt de 3-fasen rail toegepast. Voor extra flexibiliteit in projecten waarbij onder andere noodverlichting, 1-10v dimbaar of Dali toegepast wordt is een 3-fasen DIM rail beschikbaar (3 fasen + 2 data lijnen). Verkrijgbaar in wit (RAL9003), zwart (RAL9005) en grijs (RAL9006).

Surface mounted track systems are extremely suitable for use in shop, museums and other rooms where mounting options are few and flexibility is needed. With the modular design the positions of luminaires can be easily changed long after installation. For more demanding projects with a combination of emergency lighting, 1-10v dimming and Dali the 3-phase DIM system is available (3-phases and 2 datalines per track). Available in white (RAL9003), black (RAL9005) and grey (RAL9006).



Omschrijving Description	Kleur Colour	Drie fasen Three phase	Drie fasen DIM Three phase DIM
1000mm		68049W	68049W-DIM
		68049B	68049B-DIM
		68049G	68049G-DIM
2000mm		68047W	68047W-DIM
		68047B	68047B-DIM
		68047G	68047G-DIM
3000mm		68048W	68048W-DIM
		68048B	68048B-DIM
		68048G	68048G-DIM
4000mm		68023W	68023W-DIM
		68023B	68023B-DIM
		68023G	68023G-DIM
Adapter		67808W	67808W-DIM
		67808B	67808B-DIM
		67808G	67808G-DIM
Trekontlasting pendel / Strain relief pendant		67808-trek-W	67808-trek-W-DIM
		67808-trek-B	67808-trek-B-DIM
		67808-trek-G	67808-trek-G-DIM
 Voeding rechts / Live end connector right		68055W	68055W-DIM
		68055B	68055B-DIM
		68055G	68055G-DIM
 Voeding links / Live end connector left		68056W	68056W-DIM
		68056B	68056B-DIM
		68056G	68056G-DIM
 Midden voeding / Live middle connector		68052W	68052W-DIM
		68052B	68052B-DIM
		68052G	68052G-DIM
Midden verbinding / Middle connector		68053W	68053W-DIM
		68053B	68053B-DIM
		68053G	68053G-DIM
 L verbinding rechts / L connector right		68059W	68059W-DIM
		68059B	68059B-DIM
		68059G	68059G-DIM
 L verbinding links / L connector left		68050W	68050W-DIM
		68050B	68050B-DIM
		68050G	68050G-DIM






Omschrijving Description	Kleur Colour	Drie fasen Three phase	Drie fasen DIM Three phase DIM
T verbinding rechts rechts / <i>T connector right right</i>	□	68068W	68068W-DIM
	■	68068B	68068B-DIM
	■	68068G	68068G-DIM
T verbinding links links / <i>T connector left left</i>	□	68061W	68061W-DIM
	■	68061B	68061B-DIM
	■	68061G	68061G-DIM
T verbinding links rechts / <i>T connector left right</i>	□	68051W	68051W-DIM
	■	68051B	68051B-DIM
	■	68051G	68051G-DIM
T verbinding rechts links / <i>T connector right left</i>	□	68062W	68062W-DIM
	■	68062B	68062B-DIM
	■	68062G	68062G-DIM
X verbinding / <i>X connector</i>	□	68064W	68064W-DIM
	■	68064B	68064B-DIM
	■	68064G	68064G-DIM
Flexibele verbinding / <i>Flexible connector</i>	□	68065W	68065W-DIM
	■	68065B	68065B-DIM
	■	68065G	68065G-DIM
Eind kap / <i>End cap</i>	□	68058W	
	■	68058B	
	■	68058G	
Pendel set 1,5m / <i>Suspension kit 1,5m</i>	□	68066W	
	■	68066B	
	■	68066G	
Pendel set 3m / <i>Suspension kit 3m</i>	□	68067W	
	■	68067B	
	■	68067G	
Plafond bevestiging opbouw / <i>Surface mounted fixing point</i>	□	68071W	
	■	68071B	
	■	68071G	
Plafond bevestiging inbouw / <i>Recessed fixing point ceiling</i>	□	68006W	
	■	68006B	
	■	68006G	
Railklem tbv staafophanging / <i>Clamp for rod suspension</i>	□	68007W	
	■	68007B	
	■	68007G	
Staafofphanging / <i>Rod suspension 1m</i>	□	68008W	
	■	68008B	
	■	68008G	

Optioneel:
Inbouw rail systeem

Optional:
Recessed track system

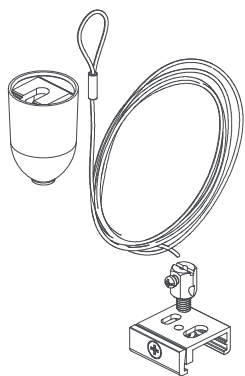

Omschrijving
Description

Kleur
Colour

Drie fasen
Three phase

Suspension kit 1,5m white + clamp + rosans(wire adjustable on clamp)	□	68066W.ADJ.1,5
Suspension kit 1,5m black + clamp + rosans(wire adjustable on clamp)	■	68066B.ADJ.1,5
Suspension kit 1,5m grey + clamp + rosans(wire adjustable on clamp)	■	68066G.ADJ.1,5
Suspension kit 3m white + clamp + rosans(wire adjustable on clamp)	□	68066W.ADJ.3
Suspension kit 3m black + clamp + rosans(wire adjustable on clamp)	■	68066B.ADJ.3
Suspension kit 3m grey + clamp + rosans(wire adjustable on clamp)	■	68066G.ADJ.3
Suspension kit 5m white + clamp + rosans(wire adjustable on clamp)	□	68066W.ADJ.5
Suspension kit 5m black + clamp + rosans(wire adjustable on clamp)	■	68066B.ADJ.5
Suspension kit 5m grey + clamp + rosans(wire adjustable on clamp)	■	68066G.ADJ.5

