


Ronde kantelbare LED downlight voor krachtige accentverlichting. 350° draaibaar en 30° kantelbaar. Gefacetteerde hoogglans 99,98% aluminium reflector met helder gehard glazen afscherming. Zeer geschikt als accent verlichting in hotels en winkels. Verkrijgbaar in RAL9003 (wit) en RAL 9005 (zwart). Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round tiltable LED downlight for powerful accent lighting. Rotates through 350° and pivots through 30°. Faceted glossy 99,98% aluminium reflector with clear tempered glass diffuser. Very suitable as spot light in shops, hotels and restaurants. Standard available in RAL9003 (white) or RAL 9005 (black). Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Graden Degree	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali
9w	3000k	1200	>80	24°	1,6	1/3	61164W.09.24.30	61164W.09.24.32
13w	3000k	1620	>80	24°	1,6	1/3	61164W.13.24.30	61164W.13.24.32
19w	3000k	2230	>80	24°	1,6	1/3	61164W.19.24.30	61164W.19.24.32
28w	3000k	3150	>80	24°	1,6	1/3	61164W.28.24.30	61164W.28.24.32
9w	4000k	1260	>80	24°	1,6	1/3	61164W.09.24.40	61164W.09.24.42
13w	4000k	1700	>80	24°	1,6	1/3	61164W.13.24.40	61164W.13.24.42
19w	4000k	2340	>80	24°	1,6	1/3	61164W.19.24.40	61164W.19.24.42
28w	4000k	3310	>80	24°	1,6	1/3	61164W.28.24.40	61164W.28.24.42

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

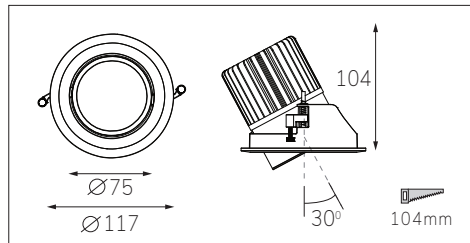


#### Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)

#### Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)



61164W.09.24.30

9w 3000K

1200 lumen 24°