



Tunable White RGB (DT8) inlegarmatuur met standaard afmetingen voor systeemplafonds (M600) of optioneel gipsplafond**. Voorzien van dimbaar RGB + tunable white LED technology (>100lm/w, 2500-7000k, CRI>90). Aanstuurbaar via DALI DT8 (slechts 1 BUS adres). RGB dimming 0-100%, CCT dimming 5-100%. Vervaardigd uit witgelakt (RAL 9003) plaatstaal. Verkrijgbaar met opalen (UGR <20) of micro prisma (UGR<18) afscherming met brede uitstralingshoek > 95°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Tunable White RGB (DT8) recessed luminaire with standard measurements for suspended ceilings (M600) or optionally gypsum ceiling**. Build-in RGB + tuneable white LED technology (>100lm/w, 2500-7000k, CRI>90). RGB dimming 0-100%, CCT dimming 5-100%. Controllable over DALI DT8 protocol (only 1 bus address per luminaire). Housing made of white painted (RAL 9003) sheet metal. With opal (UGR <20) or micro prism diffuser (UGR <18) with wide beam angle > 95°. Therefore very suitable for offices, classrooms and other working areas where there are high demands for co or optionally gypsum ceiling*. Comfortable light. Low maintenance and high life expectancy (50.000 hours L90B10). Color stability, Mac Adam <3. Warranty 5 years.

Micro Prisma Comfort / Micro Prism Comfort



Wattage Watts	Lumen Lumen	CRI (Ra) CRI (Ra)	Breedte (mm) Width (mm)	Lengte (mm) Length (mm)	Hoogte (mm) Height (mm)	Gewicht (kg) Weight (kg)	Dali (DT8) Dali (DT8)	Casambi Casambi
54w	4725	>90	595	595	65	2,8	29716MB.TW.RGB	29716MB.TW.RGBC
54w	4725	>90	295	1195	65	2,8	29716MC.TW.RGB	29716MC.TW.RGBC
108w	9450	>90	595	1195	65	5,4	29716ME.TW.RGB	29716ME.TW.RGBC

Opaal / Opal


Wattage Watts	Lumen Lumen	CRI (Ra) CRI (Ra)	Breedte (mm) Width (mm)	Lengte (mm) Length (mm)	Hoogte (mm) Height (mm)	Gewicht (kg) Weight (kg)	Dali (DT8) Dali (DT8)	Casambi Casambi
54w	4500	>90	595	595	65	2,8	29716OPB.TW.RGB	29716OPB.TW.RGBC
54w	4500	>90	295	1195	65	2,8	29716OPC.TW.RGB	29716OPC.TW.RGBC
108w	9000	>90	595	1195	65	5,4	29716OPE.TW.RGB	29716OPE.TW.RGBC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

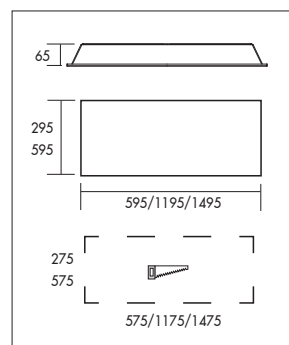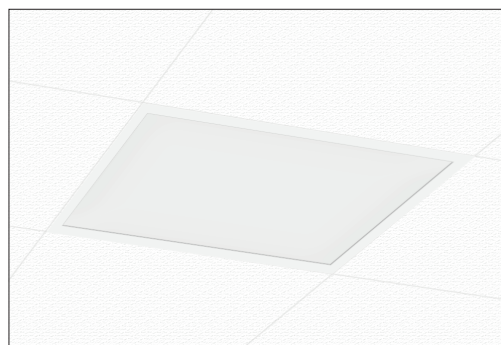

**Gipsplafond clips / Plasterboard ceiling clips 29521.CLIPS

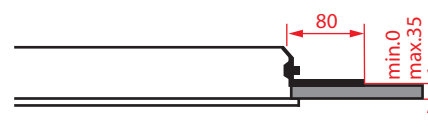


Opties:

- GST18i3[®] connector + BST14i2 connector
- GST18i5[®] connector
- Andere RAL kleur

Optional:

- GST18i3[®] connector + BST14i2 connector
- GST18i5[®] connector
- Different RAL colour



29716MB.TW.RGB

54w 4725lm
ηLB 100%