



Opbouwarmatuur vervaardigd uit witgelakt (RAL 9003) plaatstaal. Eenvoudig te openen door middel van neodymium magneten. Verkrijgbaar met opalen (UGR <20) of micro prisma (UGR<18) afscherming met brede uitstralingshoek > 95°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Surface mounted luminaire made of white painted (RAL 9003) sheet metal. Fast and easy opening with neodymium magnets. With opal (UGR <20) or micro prism diffuser (UGR <18) with wide beam angle > 95°. Therefore very suitable for offices, classrooms and other working areas where there are high demands for co or optionally gypsum ceiling*. Comfortable light. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500K. Low maintenance and high life expectancy (50.000 hours L90B10). Color stability, Mac Adam <3. Warranty 5 years.

Micro Prisma Comfort / Micro Prism Comfort



Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	B (mm) W (mm)	L (mm) L (mm)	H (mm) H (mm)	kg kg	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
26w	2700-6500K	2945	>80	300	600	65	1,3	1/3	29718MA.26.TW	29718MA.26.TWC
40w	2700-6500K	4530	>80	600	600	65	2,6	1/3	29718MB.40.TW	29718MB.40.TWC
40w	2700-6500K	4530	>80	300	1200	65	2,6	1/3	29718MC.40.TW	29718MC.40.TWC
50w	2700-6500K	5660	>80	300	1500	65	2,6	1/3	29718MD.50.TW	29718MD.50.TWC
76w	2700-6500K	9010	>80	600	1200	65	5,2	1/3	29718ME.76.TW	29718ME.76.TWC

Opaal / Opal

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	B (mm) W (mm)	L (mm) L (mm)	H (mm) H (mm)	kg kg	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
26w	2700-6500K	2715	>80	300	600	65	1,3	1/3	29718OPA.26.TW	29718OPA.26.TWC
40w	2700-6500K	4180	>80	600	600	65	2,6	1/3	29718OPB.40.TW	29718OPB.40.TWC
40w	2700-6500K	4180	>80	300	1200	65	2,6	1/3	29718OPC.40.TW	29718OPC.40.TWC
50w	2700-6500K	5225	>80	300	1500	65	2,6	1/3	29718OPD.50.TW	29718OPD.50.TWC
76w	2700-6500K	8300	>80	600	1200	65	5,2	1/3	29718OPE.76.TW	29718OPE.76.TWC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

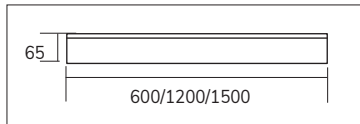

29718MA.26.TW
26w 2945lm 2700-6500k
ηLB 100%