



Tunable White (DT8) inlegarmatuur met standaard afmetingen voor systeemplafonds (M600) of optioneel gipsplafond**.

Vervaardigd uit witgelakt (RAL 9003) plaatstaal. Verkrijgbaar met opalen (UGR <20) of micro prisma (UGR<19) afscherming met brede uitstralingshoek > 95°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Tunable White (DT8) recessed luminaire with standard measurements for suspended ceilings (M600) or optionally gypsum ceiling**. Housing made of white painted (RAL 9003) sheet metal. With opal (UGR <20) or micro prism diffuser (UGR <19) with wide beam angle > 95°. Therefore very suitable for offices, classrooms and other working areas where there are high demands for co or optionally gypsum ceiling*. Comfortable light. Low maintenance and high life expectancy (50.000 hours L90B10). Color stability, Mac Adam <3. Warranty 5 years.

Micro Prisma Comfort / Micro Prism Comfort



Wattage Watts	Kleur Colour	Lumen Lumen	CRI (Ra) CRI (Ra)	Breedte (mm) Width (mm)	Lengte (mm) Length (mm)	Hoogte (mm) Height (mm)	kg	Noodvoorz. (u) Emergency (h)	Dali (DT8) Dali (DT8)	Casambi Casambi
26w	2700-6500k	2860	>80	295	595	65	1,3	1/3	29716MA.26.TW	29716MA.26.TWC
40w	2700-6500k	4400	>80	595	595	65	2,6	1/3	29716MB.40.TW	29716MB.40.TWC
40w	2700-6500k	4400	>80	295	1195	65	2,6	1/3	29716MC.40.TW	29716MC.40.TWC
50w	2700-6500k	5500	>80	295	1495	65	2,6	1/3	29716MD.50.TW	29716MD.50.TWC
76w	2700-6500k	8360	>80	595	1195	65	5,2	1/3	29716ME.76.TW	29716ME.76.TWC

Opaal / Opal


Wattage Watts	Kleur Colour	Lumen Lumen	CRI (Ra) CRI (Ra)	Breedte (mm) Width (mm)	Lengte (mm) Length (mm)	Hoogte (mm) Height (mm)	kg	Noodvoorz. (u) Emergency (h)	Dali (DT8) Dali (DT8)	Casambi Casambi
26w	2700-6500k	2730	>80	295	595	65	1,3	1/3	29716OPA.26.TW	29716OPA.26.TWC
40w	2700-6500k	4200	>80	595	595	65	2,6	1/3	29716OPB.40.TW	29716OPB.40.TWC
40w	2700-6500k	4200	>80	295	1195	65	2,6	1/3	29716OPC.40.TW	29716OPC.40.TWC
50w	2700-6500k	5250	>80	295	1495	65	2,6	1/3	29716OPD.50.TW	29716OPD.50.TWC
76w	2700-6500k	7980	>80	595	1195	65	5,2	1/3	29716OPE.76.TW	29716OPE.76.TWC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

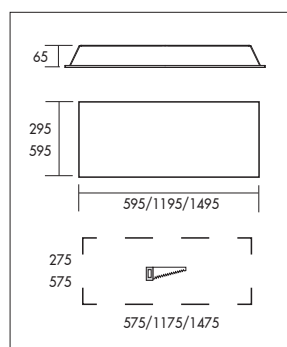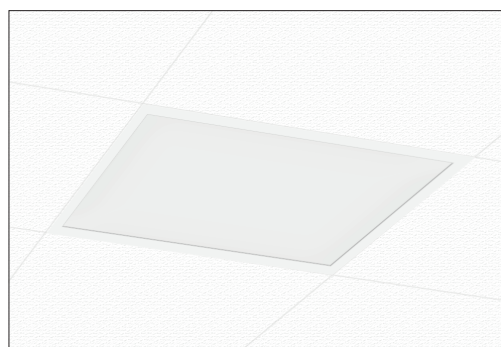

**Gipsplafond clips / Plasterboard ceiling clips 29521.CLIPS

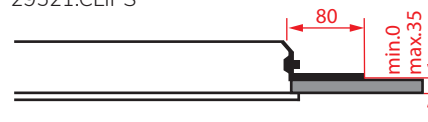


Opties:

- GST18i3[®] connector + BST14i2 connector
- GST18i5[®] connector
- Andere RAL kleur

Optional:

- GST18i3[®] connector + BST14i2 connector
- GST18i5[®] connector
- Different RAL colour



29716MA.26.TW

26w 2700-6500k 2860lm
ηLB 100%