Riga TW

Tunable White

Tunable White (DT8) inlegarmatuur met standaard afmetingen voor systeemplafonds (M600) of optioneel gipsplafond**. Vervaardigd uit witgelakt (RAL 9003) plaatstaal. Verkrijgbaar met opalen (UGR <20) of micro prisma (UGR<19) afscherming met brede uitstralingshoek > 95º. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

*Tunable White (DT8) recessed luminaire with standard measurements for suspended ceilings (M600) or optionally gypsum ceiling**. Housing made of white painted (RAL 9003) sheet metal. With opal (UGR <20) or micro prism diffuser (UGR <19) with wide beam angle > 95º. Therefore very suitable for offices, classrooms and other working areas where there are high demands for co or optionally gyspum ceiling*. Commfortable light. Low maintenance and high life expectancy (100.000 hours L80B10). Color stability, Mac Adam <3. Warranty 5 years.*

Micro Prisma Comfort / *Micro Prism Comfort*


Wattage Watts	**Kleur** Colour	**Lumen** Lumen	**CRI (Ra)** CRI (Ra)	**Breedte (mm)** Width (mm)	**Lengte (mm)** Length (mm)	**Hoogte (mm)** Height (mm)	**kg** kg	**Noodvoorz. (u)** Emergency (h)	**Dali (DT8)** Dali (DT8)	**Casambi** Casambi
26w	2700-6500k	2860	>80	295	595	65	1,3	1/3	29716MA.26.TW	29716MA.26.TWC
40w	2700-6500k	4400	>80	595	595	65	2,6	1/3	29716MB.40.TW	29716MB.40.TWC
40w	2700-6500k	4400	>80	295	1195	65	2,6	1/3	29716MC.40.TW	29716MC.40.TWC
50w	2700-6500k	5500	>80	295	1495	65	2,6	1/3	29716MD.50.TW	29716MD.50.TWC
76w	2700-6500k	8360	>80	595	1195	65	5,2	1/3	29716ME.76.TW	29716ME.76.TWC


Opaal / *Opal*

Wattage Watts	**Kleur** Colour	**Lumen** Lumen	**CRI (Ra)** CRI (Ra)	**Breedte (mm)** Width (mm)	**Lengte (mm)** Length (mm)	**Hoogte (mm)** Height (mm)	**kg** kg	**Noodvoorz. (u)** Emergency (h)	**Dali (DT8)** Dali (DT8)	**Casambi** Casambi
26w	2700-6500k	2730	>80	295	595	65	1,3	1/3	29716OPA.26.TW	29716OPA.26.TWC
40w	2700-6500k	4200	>80	595	595	65	2,6	1/3	29716OPB.40.TW	29716OPB.40.TWC
40w	2700-6500k	4200	>80	295	1195	65	2,6	1/3	29716OPC.40.TW	29716OPC.40.TWC
50w	2700-6500k	5250	>80	295	1495	65	2,6	1/3	29716OPD.50.TW	29716OPD.50.TWC
76w	2700-6500k	7980	>80	595	1195	65	5,2	1/3	29716OPE.76.TW	29716OPE.76.TWC

* Lichtstroom van armatuur, tolerantie van +/- 10%


* *Luminaire luminous flux, tolerance of +/- 10%*

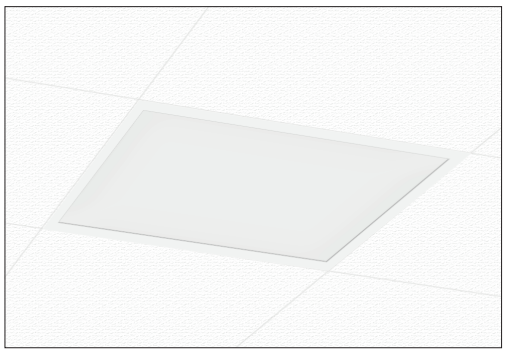

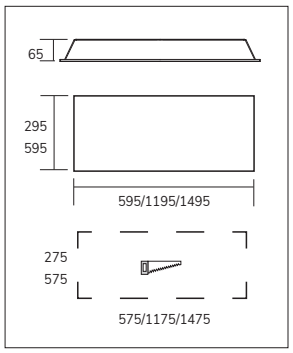


****Gipsplafond clips / *Plasterboard ceiling clips***

29521.CLIPS

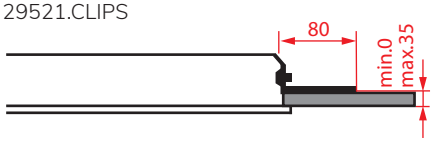

Opties:
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

Optional:
- *GST18i3® connector + BST14i2 connector*
- *GST18i5® connector*
- *Different RAL colour*



29716MA.26.TW
26w 2700-6500k 2860lm
ηLB 100%

melis lighting