

Rondo SUSPENDED




Krachtige ronde pendel LED downlight voorzien van aluminium (99,98%) gesatineerde reflector met medium uitstraling (>40°). Wit gelakte (RAL 9003) behuizing en modulaire aluminium sierring (optioneel zilver grijs). Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer goed toepasbaar in vides, kerken en moskeeën. Inclusief 3 meter snoer en staal kabels (3x). Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Powerful round suspended LED downlight with 99,98% aluminium satin reflector with medium beam angle (>40°). White painted (RAL 9003) housing and modular aluminium bezel (optionally silver grey). Ideal for lighting high rooms like lobby's, churches and mosques. Delivered including internal driver. Direct connection to mains. Including 3 meter cable and steel wires (3x). Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali Dali
18w	3000k	2440	500	1,2	1	23012WPN.18.30	23012WPN.18.31	23012WPN.18.32
25w	3000k	3275	700	1,2	1	23012WPN.25.30	23012WPN.25.31	23012WPN.25.32
33w	3000k	4290	900	1,2	1	23012WPN.33.30	23012WPN.33.31	23012WPN.33.32
18w	4000k	2560	500	1,2	1	23012WPN.18.40	23012WPN.18.41	23012WPN.18.42
25w	4000k	3550	700	1,2	1	23012WPN.25.40	23012WPN.25.41	23012WPN.25.42
33w	4000k	4500	900	1,2	1	23012WPN.33.40	23012WPN.33.41	23012WPN.33.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

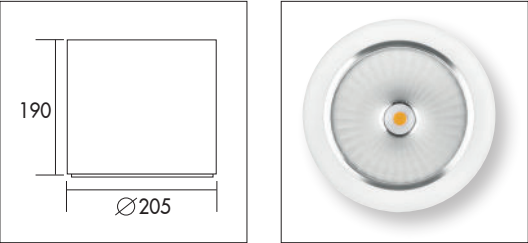


PENDEL ARMATUREN SUSPENDED LUMINAIRES



- Opties:**
- 2700k
 - 90CRI of 97CRI

- Opties:**
- 2700k
 - 90CRI or 97CRI



23012WPN.25.40
25w 4000k 3550lm
ηLB 81,5%