

Rondo Surface




Krachtige ronde opbouw LED downlight voorzien van aluminium (99,98%) gesatineerde reflector met medium uitstraling (40°). Wit gelakte (RAL 9003) behuizing en modulaire aluminium sierring (optioneel zilver grijs). Ideaal voor het aanlichten van ruimtes op grote hoogtes zoals entrees, vides en hotellobby's (CRI>80). Wordt geleverd inclusief interne driver met mogelijkheid tot doorlussen. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Powerful round LED downlight with 99,98% aluminium satin reflector with medium beam angle (40°). White painted (RAL 9003) housing and modular aluminium bezel (optionally silver grey). Ideal for lighting large rooms at high heights like hotel lobby's or entrances (CRI>80). Delivered including internal driver with possibility for through-wiring. Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali Dali
18w	3000k	2425	500	2,4	1	23012WPB.18.30	23012WPB.18.31	23012WPB.18.32
25w	3000k	3315	700	2,4	1	23012WPB.25.30	23012WPB.25.31	23012WPB.25.32
33w	3000k	4420	900	2,4	1	23012WPB.33.30	23012WPB.33.31	23012WPB.33.32
18w	4000k	2550	500	2,4	1	23012WPB.18.40	23012WPB.18.41	23012WPB.18.42
25w	4000k	3480	700	2,4	1	23012WPB.25.40	23012WPB.25.41	23012WPB.25.42
33w	4000k	4640	900	2,4	1	23012WPB.33.40	23012WPB.33.41	23012WPB.33.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

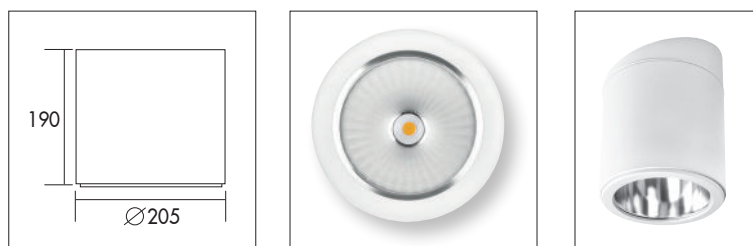

OPBOUW DOWNLIGHTS

SURFACE MOUNTED DOWNLIGHTS




Opties:

- 2700k
- 90CRI of 97CRI
- Schuinstelling voor aflopende plafonds op aanvraag

Opties:

- 2700k
- 90CRI of 97CRI
- Diagonal attachment for sloped ceilings on request



23012WPB.25.30

25w 3000k 3315lm
ηLB 82%

melis lighting