

Rondo



Krachtige ronde LED downlight voorzien van aluminium (99,98%) gesatineerde reflector met medium uitstraling (>40°) CRI>80. Wit gelakte (RAL 9003) modulaire aluminium sierring. Ideaal voor het aanlichten van ruimtes op grote hoogtes zoals entrees, vides en hotellobby's. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Powerful round LED downlight with 99,98% aluminium satin reflector with medium beam angle (>40°) CRI>80. White painted (RAL 9003) modular aluminium bezel. Ideal for lighting large rooms at high heights like hotel lobby's or entrances. Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.


Wattage Watts	Kleur Colour	Lumen* Lumen*	Hoogte (mm) Height (mm)	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali Dali
18w	3000k	2440	99	500	1,2	1/3	23012W.18.30	23012W.18.31	23012W.18.32
25w	3000k	3280	99	700	1,2	1/3	23012W.25.30	23012W.25.31	23012W.25.32
33w	3000k	4055	99	900	1,2	1/3	23012W.33.30	23012W.33.31	23012W.33.32
39w	3000k	4600	99	1050	1,2	1/3	23012W.39.30	23012W.39.31	23012W.39.32
45w	3000k	5135	135	1200	1,4	1/3	23012W.45.30	23012W.45.31	23012W.45.32
54w	3000k	5800	135	1400	1,4	1/3	23012W.54.30		23012W.54.32
62w	3000k	6400	135	1750	1,4	1/3	23012W.62.30		23012W.62.32
18w	4000k	2560	99	500	1,2	1/3	23012W.18.40	23012W.18.41	23012W.18.42
25w	4000k	3450	99	700	1,2	1/3	23012W.25.40	23012W.25.41	23012W.25.42
33w	4000k	4265	99	900	1,2	1/3	23012W.33.40	23012W.33.41	23012W.33.42
39w	4000k	4850	99	1050	1,2	1/3	23012W.39.40	23012W.39.41	23012W.39.42
45w	4000k	5410	135	1200	1,4	1/3	23012W.45.40	23012W.45.41	23012W.45.42
54w	4000k	6110	135	1400	1,4	1/3	23012W.54.40		23012W.54.42
62w	4000k	6740	135	1750	1,4	1/3	23012W.62.40		23012W.62.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%



INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS

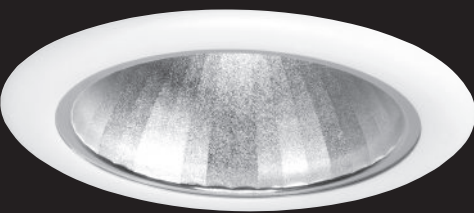


Opties:

- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White



23012W.39.40

39w 4000k 4850lm

ηLB 81,5%

melis lighting