

Elegant grijs of wit gelakt aluminium pendel armatuur met directe/indirecte lichtbundel. Voorzien van hoogwaardig PMMA opaal acrylaat of micro prisma met brede bundel voor gelijkmatig lichtbeeld (85°). Hoog voltage en hoog rendement LED lines (>120lm/w). Geschikt voor o.a. scholen, kantoren, recepties en galeriën. Alle elektronische componenten in de behuizing. Wordt geleverd inclusief 2 staalkabels (1m) met trapezium ophanging. Optie: aansluitsnoer + beschermkapje. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Elegant grey or white painted aluminium suspended luminaire with direct/indirect beam angle. With high grade PMMA opal acrylic or micro prism diffuser with wide beam angle (85°). High voltage LED lines (>120lm/w). Suitable in schools, offices and receptions. All electronic components inside the housing. Delivered including 2 steel cables with Y-shaped suspension (1m). Power cable including protective cover, optional. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.

## Micro Prisma Comfort / Micro Prism Comfort

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Breedte (mm) Width (mm)	Hoogte (mm) Height (mm)	kg	Artikel nr. Article no.	Dali
47w	3000k	5052	>80	1300	220	25	7	21024GC.47.30	21024GC.47.32
47w	3000k	5052	>80	1300	220	25	7	21024WC.47.30	21024WC.47.32
58w	3000k	6062	>80	1580	220	25	8	21024GC.58.30	21024GC.58.32
58w	3000k	6062	>80	1580	220	25	8	21024WC.58.30	21024WC.58.32
47w	4000k	5318	>80	1300	220	25	7	21024GC.47.40	21024GC.47.42
47w	4000k	5318	>80	1300	220	25	7	21024WC.47.40	21024WC.47.42
58w	4000k	6381	>80	1580	220	25	8	21024GC.58.40	21024GC.58.42
58w	4000k	6381	>80	1580	220	25	8	21024WC.58.40	21024WC.58.42

## Micro Prisma / Micro Prism




Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Breedte (mm) Width (mm)	Hoogte (mm) Height (mm)	kg	Artikel nr. Article no.	Dali
47w	3000k	5072	>80	1300	220	25	7	21024GM.47.30	21024GM.47.32
47w	3000k	5072	>80	1300	220	25	7	21024WM.47.30	21024WM.47.32
58w	3000k	6086	>80	1580	220	25	8	21024GM.58.30	21024GM.58.32
58w	3000k	6086	>80	1580	220	25	8	21024WM.58.30	21024WM.58.32
47w	4000k	5339	>80	1300	220	25	7	21024GM.47.40	21024GM.47.42
47w	4000k	5339	>80	1300	220	25	7	21024WM.47.40	21024WM.47.42
58w	4000k	6406	>80	1580	220	25	8	21024GM.58.40	21024GM.58.42
58w	4000k	6406	>80	1580	220	25	8	21024WM.58.40	21024WM.58.42

## Opaal / Opal


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Breedte (mm) Width (mm)	Hoogte (mm) Height (mm)	kg	Artikel nr. Article no.	Dali
47w	3000k	5339	>80	1300	220	25	7	21024GO.47.30	21024GO.47.32
47w	3000k	5339	>80	1300	220	25	7	21024WO.47.30	21024WO.47.32
58w	3000k	6406	>80	1580	220	25	8	21024GO.58.30	21024GO.58.32
58w	3000k	6406	>80	1580	220	25	8	21024WO.58.30	21024WO.58.32
47w	4000k	5620	>80	1300	220	25	7	21024GO.47.40	21024GO.47.42
47w	4000k	5620	>80	1300	220	25	7	21024WO.47.40	21024WO.47.42
58w	4000k	6743	>80	1580	220	25	8	21024GO.58.40	21024GO.58.42
58w	4000k	6743	>80	1580	220	25	8	21024WO.58.40	21024WO.58.42

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

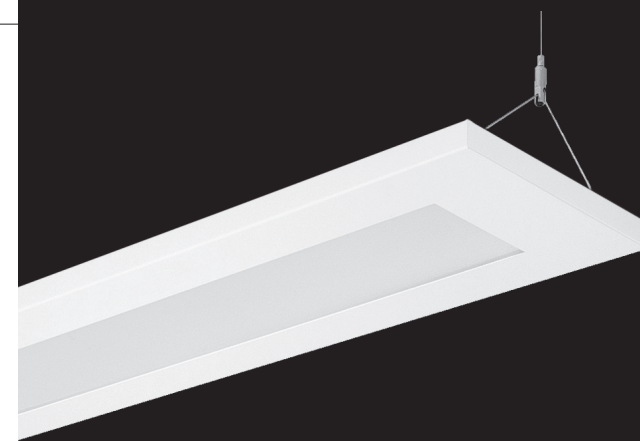

## Koppelstuk/Connector

**21024GC.47.30**

47w 3000k 5052lm

54%up 46% down ηLB 100%

**21024W.set** (wit/white)**21024G.set** (grijs/grey)**melis lighting**