
Sharp BLACK

PF>0,9 IP20

Elegant en slank LED pendel armatuur. Behuizing gemaakt van geëxtrudeerd aluminium gelakt in zwart (RAL 9005). Voorzien van breedstralende (>94°) hoogwaardige Micro Prisma, Opaal of Louvre diffuser met lage verblindingsgraad. Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Wordt geleverd inclusief pendel accessoires: staalkabels (3m) en snoer (3,5m). Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Elegant slim suspended LED luminaire. Housing made out of extruded aluminium painted black (RAL 9005). Equipped with high quality wide angle (>94°) Micro Prisma, Opal or Louvre diffuser with low glare. Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Delivered including pendant suspension, steel cables (3m) and mains cable (3,5m). Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

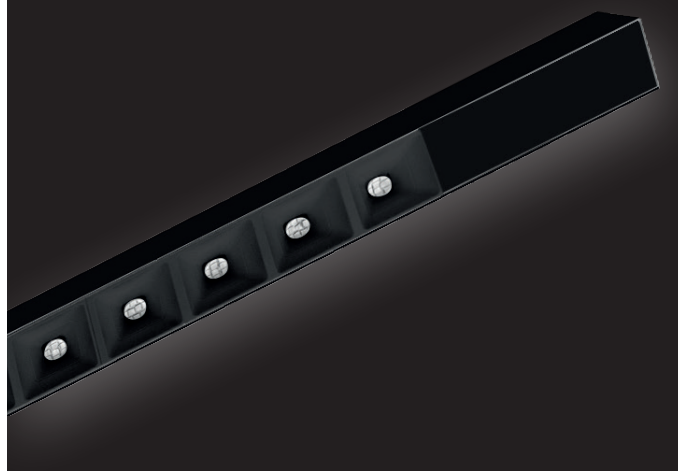

Micro prisma / *Micro prism*

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**Lengte (mm)** *Length (mm)*	**Breedte (mm)** *Width (mm)*	**Hoogte (mm)** *Height (mm)*	**Gewicht (kg)** *Weight (kg)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
14w	3000k	1380	>80	600	75	80	1,8	61220BM.14.30	61220BM.14.32
21w	3000k	2070	>80	900	75	80	2,0	61220BM.21.30	61220BM.21.32
27w	3000k	2690	>80	1200	75	80	2,4	61220BM.27.30	61220BM.27.32
34w	3000k	3390	>80	1500	75	80	2,6	61220BM.34.30	61220BM.34.32
40w	3000k	4000	>80	1800	75	80	2,8	61220BM.40.30	61220BM.40.32
14w	4000k	1450	>80	600	75	80	1,8	61220BM.14.40	61220BM.14.42
21w	4000k	2170	>80	900	75	80	2,0	61220BM.21.40	61220BM.21.42
27w	4000k	2825	>80	1200	75	80	2,4	61220BM.27.40	61220BM.27.42
34w	4000k	3560	>80	1500	75	80	2,6	61220BM.34.40	61220BM.34.42
40w	4000k	4200	>80	1800	75	80	2,8	61220BM.40.40	61220BM.40.42

Opaal / *Opal*


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**Lengte (mm)** *Length (mm)*	**Breedte (mm)** *Width (mm)*	**Hoogte (mm)** *Height (mm)*	**Gewicht (kg)** *Weight (kg)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
14w	3000k	1315	>80	600	75	80	1,8	61220BOP.14.30	61220BOP.14.32
21w	3000k	1975	>80	900	75	80	2,0	61220BOP.21.30	61220BOP.21.32
27w	3000k	2565	>80	1200	75	80	2,4	61220BOP.27.30	61220BOP.27.32
34w	3000k	3230	>80	1500	75	80	2,6	61220BOP.34.30	61220BOP.34.32
40w	3000k	3800	>80	1800	75	80	2,8	61220BOP.40.30	61220BOP.40.32
14w	4000k	1380	>80	600	75	80	1,8	61220BOP.14.40	61220BOP.14.42
21w	4000k	2070	>80	900	75	80	2,0	61220BOP.21.40	61220BOP.21.42
27w	4000k	2690	>80	1200	75	80	2,4	61220BOP.27.40	61220BOP.27.42
34w	4000k	3390	>80	1500	75	80	2,6	61220BOP.34.40	61220BOP.34.42
40w	4000k	3990	>80	1800	75	80	2,8	61220BOP.40.40	61220BOP.40.42

Louvre / *Grid*


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**Lengte (mm)** *Length (mm)*	**Breedte (mm)** *Width (mm)*	**Hoogte (mm)** *Height (mm)*	**Gewicht (kg)** *Weight (kg)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
16w	3000k	2280	>80	600	75	80	1,8	61220BL.16.30	61220BL.16.32
24w	3000k	3420	>80	900	75	80	2,0	61220BL.24.30	61220BL.24.32
32w	3000k	4410	>80	1200	75	80	2,4	61220BL.32.30	61220BL.32.32
40w	3000k	5320	>80	1500	75	80	2,6	61220BL.40.30	61220BL.40.32
48w	3000k	6385	>80	1800	75	80	2,8	61220BL.48.30	61220BL.48.32
16w	4000k	2400	>80	600	75	80	1,8	61220BL.16.40	61220BL.16.42
24w	4000k	3600	>80	900	75	80	2,0	61220BL.24.40	61220BL.24.42
32w	4000k	4640	>80	1200	75	80	2,4	61220BL.32.40	61220BL.32.42
40w	4000k	5600	>80	1500	75	80	2,6	61220BL.40.40	61220BL.40.42
48w	4000k	6720	>80	1800	75	80	2,8	61220BL.48.40	61220BL.48.42


* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*



61220BL.16.30
16w 3000k 2280lm
ηLB 100%

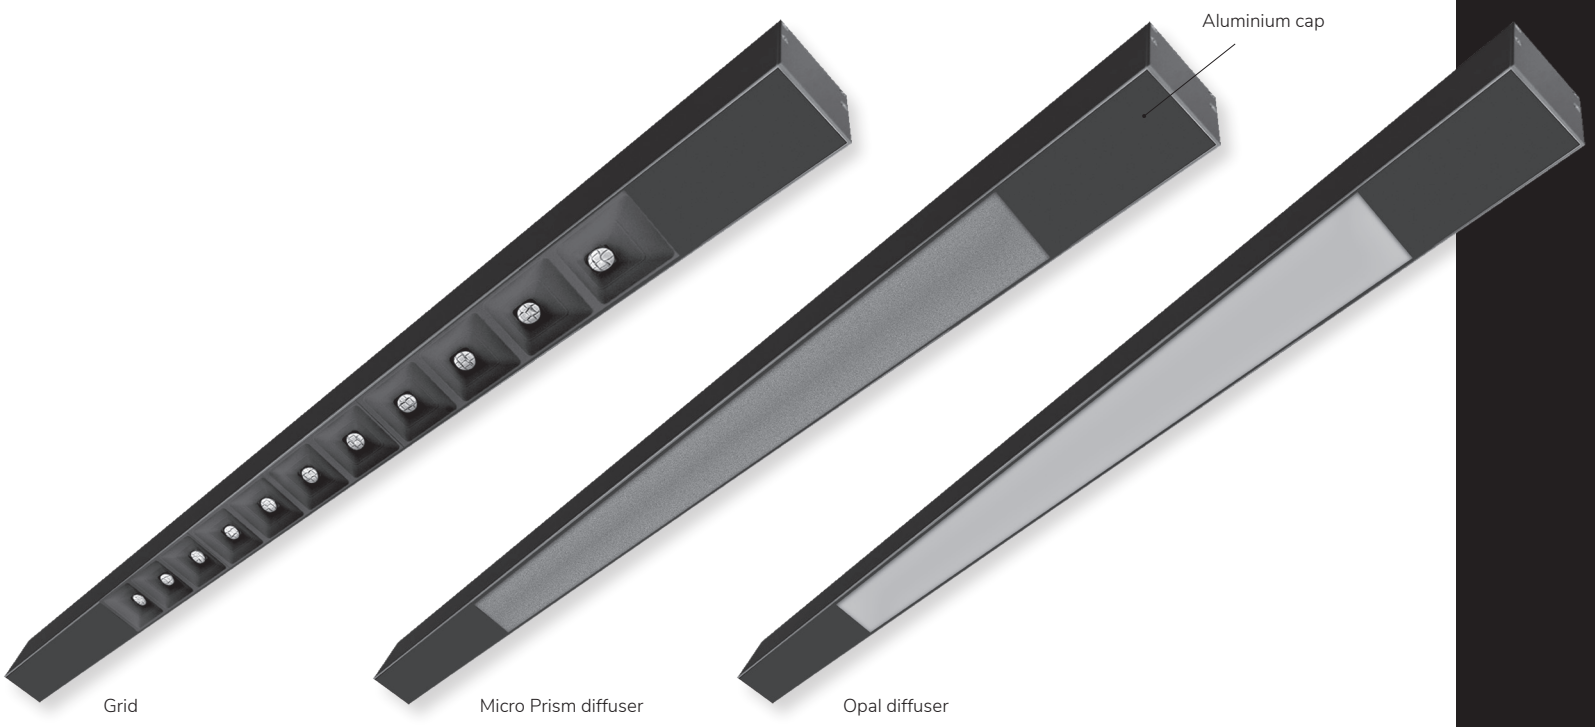
Aluminium cap
Grid
Micro Prism diffuser
Opal diffuser

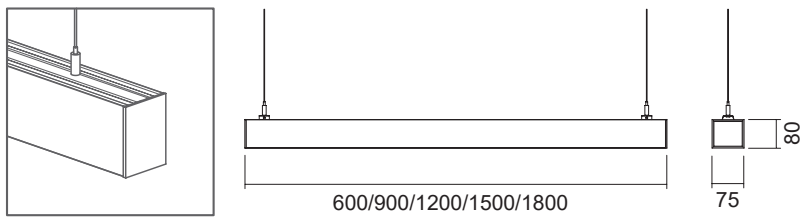
600/900/1200/1500/1800
80
75