

Skope 186 BLACK




Grote krachtige draaibare (350°) en kantelbare (80°) LED spot. Voorzien van LED met hoge lichtopbrengst (max. 163lm/w) met **CRI>93**. Met lichtgewicht innovatief heat pipe systeem voor passieve koeling van de LED. Behuizing gemaakt van zwart (RAL 9005) gelakt gegoten aluminium. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Hoge kleurconsistentie SDCM <2. Snelle en eenvoudige montage met veren. Vijf jaar garantie.

Round LED spot light for powerful general or accent lighting. Rotates through 350° and pivots through 80°. With high efficiency LED (max. 163lm/w) with **CRI>93**. Facetted glossy 99,98% aluminium reflector with clear tempered glass diffuser. Very suitable as spot light in shops. Standard available in black (RAL 9005). Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Graden Degree	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr.* Article no.	1-10V 1-10V	Dali-2 Dali-2
17w	3000k	2443	>93	24°	1,4	1/3	20035B.17.24.30	20035B.17.24.31	20035B.17.24.32
25w	3000k	3339	>93	24°	1,4	1/3	20035B.25.24.30	20035B.25.24.31	20035B.25.24.32
33w	3000k	4189	>93	24°	1,4	1/3	20035B.33.24.30	20035B.33.24.31	20035B.33.24.32
39w	3000k	4765	>93	24°	1,4	1/3	20035B.39.24.30	20035B.39.24.31	20035B.39.24.32
17w	3000k	2491	>93	40°	1,4	1/3	20035B.17.40.30	20035B.17.40.31	20035B.17.40.32
25w	3000k	3405	>93	40°	1,4	1/3	20035B.25.40.30	20035B.25.40.31	20035B.25.40.32
33w	3000k	4272	>93	40°	1,4	1/3	20035B.33.40.30	20035B.33.40.31	20035B.33.40.32
39w	3000k	4860	>93	40°	1,4	1/3	20035B.39.40.30	20035B.39.40.31	20035B.39.40.32
17w	3000k	2281	>93	60°	1,4	1/3	20035B.17.60.30	20035B.17.60.31	20035B.17.60.32
25w	3000k	3118	>93	60°	1,4	1/3	20035B.25.60.30	20035B.25.60.31	20035B.25.60.32
33w	3000k	3911	>93	60°	1,4	1/3	20035B.33.60.30	20035B.33.60.31	20035B.33.60.32
39w	3000k	4449	>93	60°	1,4	1/3	20035B.39.60.30	20035B.39.60.31	20035B.39.60.32
17w	4000k	2443	>93	24°	1,4	1/3	20035B.17.24.40	20035B.17.24.41	20035B.17.24.42
25w	4000k	3339	>93	24°	1,4	1/3	20035B.25.24.40	20035B.25.24.41	20035B.25.24.42
33w	4000k	4189	>93	24°	1,4	1/3	20035B.33.24.40	20035B.33.24.41	20035B.33.24.42
39w	4000k	4765	>93	24°	1,4	1/3	20035B.39.24.40	20035B.39.24.41	20035B.39.24.42
17w	4000k	2491	>93	40°	1,4	1/3	20035B.17.40.40	20035B.17.40.41	20035B.17.40.42
25w	4000k	3405	>93	40°	1,4	1/3	20035B.25.40.40	20035B.25.40.41	20035B.25.40.42
33w	4000k	4272	>93	40°	1,4	1/3	20035B.33.40.40	20035B.33.40.41	20035B.33.40.42
39w	4000k	4860	>93	40°	1,4	1/3	20035B.39.40.40	20035B.39.40.41	20035B.39.40.42
17w	4000k	2281	>93	60°	1,4	1/3	20035B.17.60.40	20035B.17.60.41	20035B.17.60.42
25w	4000k	3118	>93	60°	1,4	1/3	20035B.25.60.40	20035B.25.60.41	20035B.25.60.42
33w	4000k	3911	>93	60°	1,4	1/3	20035B.33.60.40	20035B.33.60.41	20035B.33.60.42
39w	4000k	4449	>93	60°	1,4	1/3	20035B.39.60.40	20035B.39.60.41	20035B.39.60.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

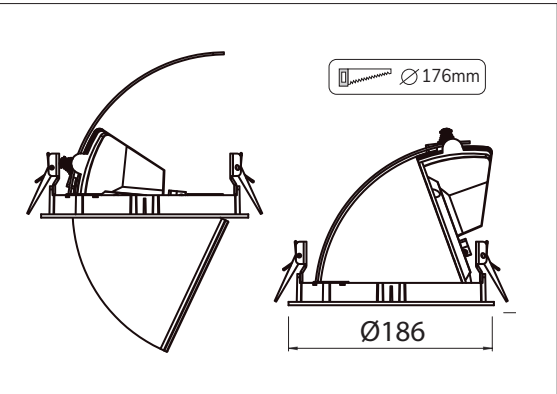

SPOTS SPOTS

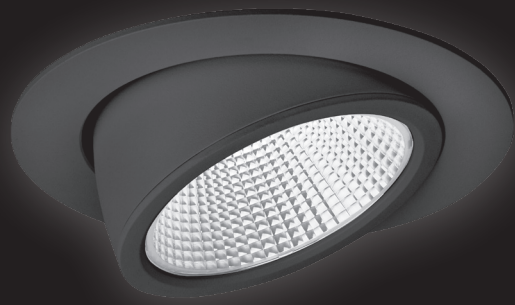


Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- 2700K, 3500k, 5000k
- Vlees, brood of Crisp White

Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- 2700k, 3500k, 5000k
- Meat, bread or Crisp White



20035B.17.24.30
17W 2443m 3000k 24°
ηLB 100%

melis lighting