

Zeer hoogwaardige krachtige pendel armatuur met hoge lichtopbrengst (max. 160 lm/w) en compact design. Poeder gecoat aluminium behuizing met decoratieve vorm. Geschikt voor o.a. magazijnen, distributie centra, scholen, koude opslag en recreatie voorzieningen. Gebruikstemperatuur -25°~+60°. Voorzien van 30 cm snoer. Onderhoudsarm en hoge levensduurverwachting (60.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Compact powerful suspended LED luminaire with high light output (max. 160 lm/w) and functional design. Powder coated aluminum housing with decorative perforation. Suitable for warehouses, distribution centers, schools, cold storage and indoor recreational facilities. Operating temperature -25°~+60°. Low maintenance and high life expectancy (60.000 hours L90B10). Delivered including 30 cm power cord. Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Diameter(mm) Diameter(mm)	CRI (Ra) CRI (Ra)	Graden Degrees	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali
72w	4000k	12.850	371	80	55	3,3	1/3	61195.72.55.40	61195.72.55.42
72w	4000k	12.850	371	80	75	3,3	1/3	61195.72.75.40	61195.72.75.42
72w	4000k	13.300	371	80	105	3,3	1/3	61195.72.105.40	61195.72.105.42
104w	4000k	18.300	371	80	55	3,4	1/3	61195.104.55.40	61195.104.55.42
104w	4000k	18.300	371	80	75	3,4	1/3	61195.104.75.40	61195.104.75.42
104w	4000k	19.000	371	80	105	3,4	1/3	61195.104.105.40	61195.104.105.42
126w	4000k	21.950	371	80	55	3,4	1/3	61195.126.55.40	61195.126.55.42
126w	4000k	21.950	371	80	75	3,4	1/3	61195.126.75.40	61195.126.75.42
126w	4000k	22.700	371	80	105	3,4	1/3	61195.126.105.40	61195.126.105.42
146w	4000k	25.500	371	80	55	3,4	1/3	61195.146.55.40	61195.146.55.42
146w	4000k	25.500	371	80	75	3,4	1/3	61195.146.75.40	61195.146.75.42
146w	4000k	26.400	371	80	105	3,4	1/3	61195.146.105.40	61195.146.105.42
206w	4000k	34.600	371	80	55	3,7	1/3	61195.206.55.40	61195.206.55.42
206w	4000k	34.600	371	80	75	3,7	1/3	61195.206.75.40	61195.206.75.42
206w	4000k	35.850	371	80	105	3,7	1/3	61195.206.105.40	61195.206.105.42
294w	4000k	47.500	371	80	55	3,7	1/3	61195.294.55.40	
294w	4000k	47.500	371	80	75	3,7	1/3	61195.294.75.40	
294w	4000k	49.200	371	80	105	3,7	1/3	61195.294.105.40	

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%



Opties:

- Hoge temperatuur bestendig
- Lagere UGR


Options:

- High temperature resistant
- Lower UGR




Accessoires:

- Bewegings sensor
- Afstandsbediening
- Opbouw beugel

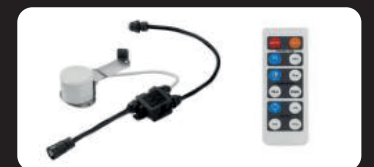

Accessories:

- Motion Sensor
- Remote control
- Surface mounting handle



61195.72.55.40

72w 4000K 12.850lm
ηLB 100,0%

