Sportiv Asymetric

Balvast opbouw LED armatuur voor gymzalen en sporthallen. Vervaardigd uit 0,5mm wit gelakte (RAL 9003) plaatstalen behuizing met decoratieve afgeronde hoeken. Het optische deel bestaat uit een wit raster met asymmetrische uitstraling en een diffuser, die zorgt voor het effect van een zachte, solide lichtstroom (UGR<21). Voorzien van hoog voltage LED met opalen afscherming. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B20, 100.000 uur L80B50). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Ball proof surface mounted LED luminaire for sport facilities and gyms. Extra strong white painted (RAL 9003) sheet metal (0,5mm) housing with bevelled edges. The optical part consists of a white grid with asymmetrical radiation and a diffuser, which provides the effect of a soft solid light flow (UGR<21). High voltage LEDs behind opal diffuser. Standard available in CRI>80.Low maintenance and high life expectancy (50.000 hours L90B20, 100.000 uur L80B50). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage Watts	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**B (mm)** *W (mm)*	**L (mm)** *L (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
82w	3000k	10.590	>80	355	1255	85	6	1/3	29608W.A82.30	29608W.A82.32	29608W.A82.37
102w	3000k	13.245	>80	355	1555	85	7,5	1/3	29608W.B102.30	29608W.B102.32	29608W.B102.37
82w	4000k	11.150	>80	355	1255	85	6	1/3	29608W.A82.40	29608W.A82.42	29608W.A82.47
102w	4000k	13.940	>80	355	1555	85	7,5	1/3	29608W.B102.40	29608W.B102.42	29608W.B102.47

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

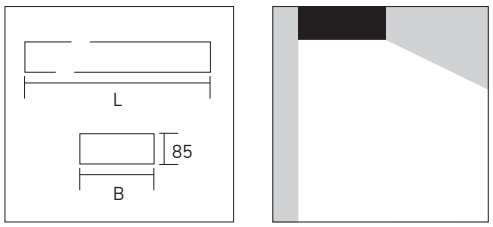

OPBOUW ARMATUREN

SURFACE MOUNTED LUMINAIRES

Opties:
- Daglicht en bewegingsregeling ingebouwd in de diffuser
- EasySense Sensor
- CRI >90

Options:
- *Daylight and motion control sensor build into the diffuser*
- *EasySense Sensor*
- *CRI >90*

Ballwurfsicherheit
Certified
DIN 18032-3



29608W.A82.30
82W 3000k 10.590lm
ηLB 100%

melis lighting