

Sportiv recessed




Balvast sporthal inleg LED armatuur met standaard afmetingen voor systeemplafonds (M600) of optioneel gipsplafonds (M625)**. Vervaardigd uit 0,5mm wit gelakte (RAL 9003) plaatstalen behuizing. Voorzien van plaatstaal reflector met stalen dwarsbladen en stangen. Lage verblinding (UGR<21). Door brede uitstralingshoek >85° hoge gelijkmatigheid op werkvlak. Met hoog voltage LED met opalen afscherming. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B20, 100.000 uur L80B50). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Ball impact proof recessed mounted LED luminaire for sport facilities and gyms with standard measurements for suspended ceilings (M600) or optionally plasterboard ceilings (M625)**. Extra strong white painted (RAL 9003) sheet metal (0,5mm) housing. Steel reflector blades and cross wires. Low glare (UGR<21). With wide beam angle >85° for high uniformity on working area. High voltage LEDs behind opal diffuser. Low maintenance and high life expectancy (50.000 uur L90B20, 100.000 uur L80B50). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Breedte (mm) Width (mm)	Lengte (mm) Length (mm)	Hoogte (mm) Height (mm)	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali
47w	3000k	5676	>80	595	595	85	6,5	1/3	29612W.A47.30	29612W.A47.32
95w	3000k	11.011	>80	595	595	85	6,5	1/3	29612W.A95.30	29612W.A95.32
47w	3000k	5718	>80	295	1195	85	5,5	1/3	29612W.B47.30	29612W.B47.32
95w	3000k	11.011	>80	295	1195	85	5,5	1/3	29612W.B95.30	29612W.B95.32
132w	3000k	15.550	>80	595	1195	85	11	1/3	29612W.C132.30	29612W.C132.32
190w	3000k	21.480	>80	595	1195	85	11	1/3	29612W.C190.30	29612W.C190.32
70w	3000k	9180	>80	295	1495	85	7,5	1/3	29612W.D70.30	29612W.D70.32
102w	3000k	12.821	>80	295	1495	85	7,5	1/3	29612W.D102.30	29612W.D102.32
142w	3000k	17.087	>80	295	1495	85	7,5	1/3	29612W.D142.30	29612W.D142.32
<hr/>										
47w	4000k	5974	>80	595	595	85	6,5	1/3	29612W.A47.40	29612W.A47.42
95w	4000k	11.590	>80	595	595	85	6,5	1/3	29612W.A95.40	29612W.A95.42
47w	4000k	6018	>80	295	1195	85	5,5	1/3	29612W.B47.40	29612W.B47.42
95w	4000k	11.590	>80	295	1195	85	5,5	1/3	29612W.B95.40	29612W.B95.42
132w	4000k	16.368	>80	595	1195	85	11	1/3	29612W.C132.40	29612W.C132.42
190w	4000k	22.610	>80	595	1195	85	11	1/3	29612W.C190.40	29612W.C190.42
70w	4000k	9662	>80	295	1495	85	7,5	1/3	29612W.D70.40	29612W.D70.42
102w	4000k	13.496	>80	295	1495	85	7,5	1/3	29612W.D102.40	29612W.D102.42
142w	4000k	17.986	>80	295	1495	85	7,5	1/3	29612W.D142.40	29612W.D142.42


* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

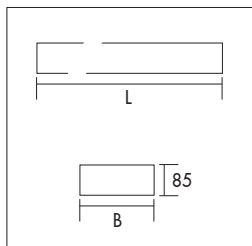


**Gipsplafond clips / Plasterboard ceiling clips

29521.CLIPS

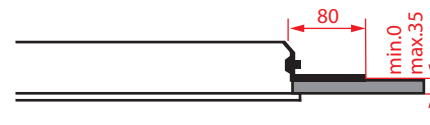

INBOUW ARMATUREN RECESSED LUMINAIRES

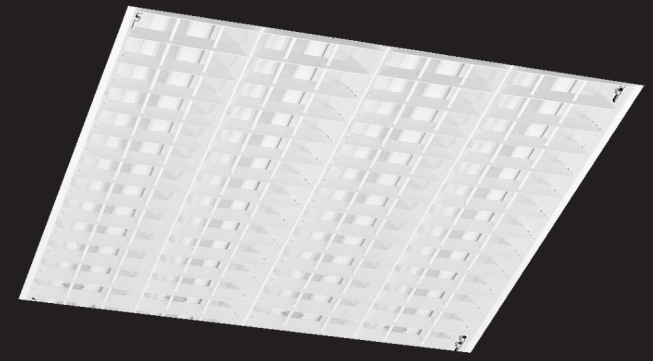


Opties:

- Daglicht en bewegingsregeling ingebouwd in de diffuser
- M625 plafondmaat
- CRI>90
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

Options:

- Daylight and motion control sensor build into the diffuser
- M625 ceiling size
- CRI>90
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Different RAL colour



29612W.A47.30

47W 3000k 5676lm

ηLB 100%

melis lighting