Spring 80

PF>0,9 IP67-IP69K IK10


IJzersterk LED wandarmatuur. Behuizing gemaakt van geëxtrudeerd aluminium. Voorzien van breedstralende (270°) hoogwaardige opaal diffuser. Geschikt voor o.a. ruimtes met hoge luchtvochtigheid zoals een autowasserette. Alle elektronische componenten in de behuizing inclusief driver. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Very strong surface mounted LED luminaire. Housing made out of extruded aluminium. Equipped with high quality wide angle (270°) opal diffuser. Suitable for areas with high humidity such as a car wash. All electronic components inside the housing including driver. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage *Watts*	**Kleur** *Colour*	**Lumen** *Lumen*	**Lengte (mm)** *Length (mm)*	**Diameter (mm)** *Diameter (mm)*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
9w	4000k	1040	600	80	1,7	1/3	61417.09.40	61417.09.42
14w	4000k	1850	600	80	1,7	1/3	61417.14.40	61417.14.42
16w	4000k	2080	1200	80	2,0	1/3	61417.16.40	61417.16.42
27w	4000k	3770	1200	80	2,0	1/3	61417.27.40	61417.27.42
40w	4000k	5070	1200	80	2,0	1/3	61417.40.40	61417.40.42
20w	4000k	2600	1500	80	2,4	1/3	61417.20.40	61417.20.42
34w	4000k	4730	1500	80	2,4	1/3	61417.34.40	61417.34.42
49w	4000k	6340	1500	80	2,4	1/3	61417.49.40	61417.49.42
55w	4000k	7060	1500	80	2,4	1/3	61417.55.40	61417.55.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

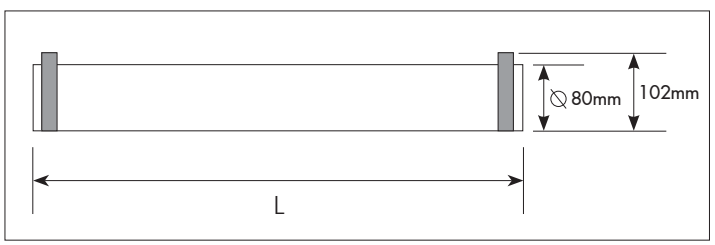












Possibility to rotate in mounting bracket

Stucchi connector



61417.09.40
9w 4000k 1040lm
ηLB 100%

melis lighting