Styx UP/DOWN RGBW

IP40 RoHS

RGBW

Vierkante pendel armatuur met decoratieve rand (55mm) en direct/indirecte verlichting. Voorzien van dimbaar RGBW uplight (CRI>90). Aanstuurbaar via DALI DT8 (slechts 1 BUS adres). RGBW dimming 0-100%. Single color down/RGBW up. Aluminium. behuizing in structuur lak zwart (RAL 9005). Homogeen verlichte diffuser van dual satin opaal PMMA. Gelijke licht dichtheid tussen verschillende afmetingen. Inclusief staalkabel (3m) en aansluitsnoer (3,5m). Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Square suspended luminaire with dropped decorative trim (55mm) and direct/indirect light. Build-in RGBW (CRI>90). RGBW dimming 0-100%. Single color down/RGBW up. Controllable over DALI DT8 protocol (only 1 bus adress per luminaire). Aluminium housing painted in structured black (RAL9005) completely homogeneously illuminated with dual satinised PMMA cover. Same light density for all sizes. Delivered including steel cable (3m) and power cables (3,5m). Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.



Micro Prisma / *Micro Prism*

Wattage *Watts*	**Kleur** *Colour*	**Lumen down*** *Lumen down**	**CRI (Ra)** *CRI (Ra)*	**Lengte (mm)** *Length (mm)*	**Breedte (mm)** *Width (mm)*	**Hoogte (mm)** *Height (mm)*	**Gewicht (kg)** *Weight (kg)*	**Dali** *Dali*	**Casambi** *Casambi*
55w+40w	3000k	5500	>80	600	600	80	8,4	27019_M.55.32	27019_M.55.35
83w+70w	3000k	8300	>80	900	900	80	14,6	27019_M.83.32	27019_M.83.35
110w+90w	3000k	11.000	>80	1200	1200	80	17	27019_M.110.32	27019_M.110.35
97w+80w	3000k	9700	>80	1500	600	80	14,7	27019_M.97.32	27019_M.97.35
111w+90w	3000k	11.000	>80	1500	900	80	16,8	27019_M.111.32	27019_M.111.35
138w+100w	3000k	13.800	>80	1500	1500	80	21	27019_M.138.32	27019_M.138.35
55w+40w	4000k	5775	>80	600	600	80	8,4	27019_M.55.42	27019_M.55.45
83w+70w	4000k	8715	>80	900	900	80	14,6	27019_M.83.42	27019_M.83.45
110w+90w	4000k	11.870	>80	1200	1200	80	17	27019_M.110.42	27019_M.110.45
97w+80w	4000k	10.185	>80	1500	600	80	14,7	27019_M.97.42	27019_M.97.45
111w+90w	4000k	11.550	>80	1500	900	80	16,8	27019_M.111.42	27019_M.111.45
138w+100w	4000k	14.490	>80	1500	1500	80	21	27019_M.138.42	27019_M.138.45

Opaal / *Opal*


Wattage *Watts*	**Kleur** *Colour*	**Lumen down*** *Lumen down**	**CRI (Ra)** *CRI (Ra)*	**Lengte (mm)** *Length (mm)*	**Breedte (mm)** *Width (mm)*	**Hoogte (mm)** *Height (mm)*	**Gewicht (kg)** *Weight (kg)*	**Dali** *Dali*	**Casambi** *Casambi*
55w+40w	3000k	5225	>80	600	600	80	8,4	27019_P.55.32	27019_P.55.35
83w+70w	3000k	7885	>80	900	900	80	14,6	27019_P.83.32	27019_P.83.35
110w+90w	3000k	10.450	>80	1200	1200	80	17	27019_P.110.32	27019_P.110.35
97w+80w	3000k	9215	>80	1500	600	80	14,7	27019_P.97.32	27019_P.97.35
111w+90w	3000k	10.450	>80	1500	900	80	16,8	27019_P.111.32	27019_P.111.35
138w+100w	3000k	13.110	>80	1500	1500	80	21	27019_P.138.32	27019_P.138.35
55w+40w	4000k	5500	>80	600	600	80	8,4	27019_P.55.42	27019_P.55.45
83w+70w	4000k	8300	>80	900	900	80	14,6	27019_P.83.42	27019_P.83.45
110w+90w	4000k	11.000	>80	1200	1200	80	17	27019_P.110.42	27019_P.110.45
97w+80w	4000k	9700	>80	1500	600	80	14,7	27019_P.97.42	27019_P.97.45
111w+90w	4000k	11.000	>80	1500	900	80	16,8	27019_P.111.42	27019_P.111.45
138w+100w	4000k	13.800	>80	1500	1500	80	21	27019_P.138.42	27019_P.138.45


* Lichtstroom van armatuur, tolerantie van +/- 10%


_ W=wit / B=zwart

* *Luminaire luminous flux, tolerance of +/- 10%*

_ W=white / B=black



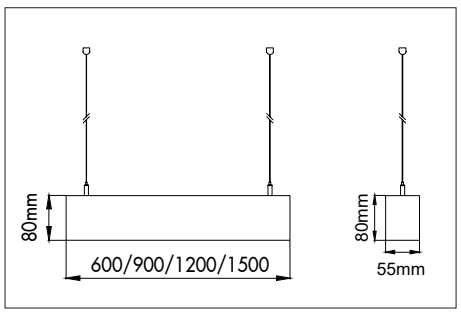



27019.WM.55.30
55w+40w 3000k 5500lm
ηLB 100%

melis lighting