Styx UP/DOWN

IP40

Vierkante pendel armatuur met decoratieve rand (55mm) en direct/indirecte verlichting. Aluminium behuizing in structuur lak zwart (RAL 9005). Homogeen verlichte diffuser van dual satin opaal PMMA. Lage verblinding op maximaal vermogen (UGR<21). Gelijke licht dichtheid tussen verschillende afmetingen. Inclusief staalkabel (3m) en aansluitsnoer (3,5m). Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Square suspended luminaire with dropped decorative trim (55mm) and direct/indirect light. Aluminium housing painted in structured black (RAL9005) completely homogeneously illuminated with dual satinised PMMA cover. Low glare at full power (UGR<21). Same light density for all sizes. Delivered including steel cable (3m) and power cables (3,5m). Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.



Micro Prisma / *Micro Prism*

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**Lengte (mm)** *Length (mm)*	**Breedte (mm)** *Width (mm)*	**Hoogte (mm)** *Height (mm)*	**Gewicht (kg)** *Weight (kg)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
55w+40w	3000k	9500	>80	600	600	80	8,4	27014_M.55.30	27014_M.55.32
83w+70w	3000k	15.300	>80	900	900	80	14,6	27014_M.83.30	27014_M.83.32
110w+90w	3000k	20.000	>80	1200	1200	80	17	27014_M.110.30	27014_M.110.32
97w+80w	3000k	17.700	>80	1500	600	80	14,7	27014_M.97.30	27014_M.97.32
111w+90w	3000k	21.000	>80	1500	900	80	16,8	27014_M.111.30	27014_M.111.32
138w+100w	3000k	23.800	>80	1500	1500	80	21	27014_M.138.30	27014_M.138.32
55w+40w	4000k	9975	>80	600	600	80	8,4	27014_M.55.40	27014_M.55.42
83w+70w	4000k	16.065	>80	900	900	80	14,6	27014_M.83.40	27014_M.83.42
110w+90w	4000k	21.000	>80	1200	1200	80	17	27014_M.110.40	27014_M.110.42
97w+80w	4000k	18.585	>80	1500	600	80	14,7	27014_M.97.40	27014_M.97.42
111w+90w	4000k	22.050	>80	1500	900	80	16,8	27014_M.111.40	27014_M.111.42
138w+100w	4000k	24.990	>80	1500	1500	80	21	27014_M.138.40	27014_M.138.42

Opaal / *Opal*


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**Lengte (mm)** *Length (mm)*	**Breedte (mm)** *Width (mm)*	**Hoogte (mm)** *Height (mm)*	**Gewicht (kg)** *Weight (kg)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
55w+40w	3000k	9025	>80	600	600	80	8,4	27014_P.55.30	27014_P.55.32
83w+70w	3000k	14.535	>80	900	900	80	14,6	27014_P.83.30	27014_P.83.32
110w+90w	3000k	19.000	>80	1200	1200	80	17	27014_P.110.30	27014_P.110.32
97w+80w	3000k	16.815	>80	1500	600	80	14,7	27014_P.97.30	27014_P.97.32
111w+90w	3000k	19.950	>80	1500	900	80	16,8	27014_P.111.30	27014_P.111.32
138w+100w	3000k	22.610	>80	1500	1500	80	21	27014_P.138.30	27014_P.138.32
55w+40w	4000k	9500	>80	600	600	80	8,4	27014_P.55.40	27014_P.55.42
83w+70w	4000k	15.300	>80	900	900	80	14,6	27014_P.83.40	27014_P.83.42
110w+90w	4000k	20.000	>80	1200	1200	80	17	27014_P.110.40	27014_P.110.42
97w+80w	4000k	17.700	>80	1500	600	80	14,7	27014_P.97.40	27014_P.97.42
111w+90w	4000k	21.000	>80	1500	900	80	16,8	27014_P.111.40	27014_P.111.42
138w+100w	4000k	23.800	>80	1500	1500	80	21	27014_P.138.40	27014_P.138.42


* Lichtstroom van armatuur, tolerantie van +/- 10%


* *Luminaire luminous flux, tolerance of +/- 10%*

_ W=wit / B=zwart

_ W=white / B=black



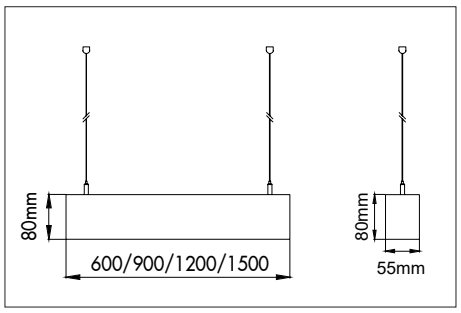



27014.WM.55.30
55w+40w 3000k 9500lm
ηLB 100%

melis lighting