




Ultra efficiënte hoogwaardige LED spotlight (max. 100lm/w) met geïntegreerde driver voor 3-fase rails. Hoogglans aluminium reflector met extreem hoog rendement in vier bundelbreedtes. Zeer lage verblinding (UGR<20) voor spot en medium bundel reflectoren. Behuizing uit wit (RAL 9016), zwart (RAL 9005) of zilvergrijs (RAL 9006) gelakt aluminium met passieve koeling. 350° draaibaar en 90° kantelbaar. Zeer geschikt als richtspot in winkels waar de hoogste eisen aan rendementen worden gesteld. Voorzien van 3-fase adapter met instelbaar uitgangsvermogen. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Ultra-efficient top range LED spot light (max. 100lm/w) with integrated driver for 3-phase tracks. High gloss aluminium reflector with extremely high efficiency and four beam angles. Very low glare (UGR<20) for spot and medium beam angle reflectors. Die casted aluminium white (RAL 9016), black (RAL 9005) or silver grey (RAL 9006) painted housing. Rotates through 350° and pivots through 90°. Very suitable as directional spot light in shops where the highest demands for quality of light are needed. Equipped with 3-phase adapter with adjustable output power. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI(Ra)	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali
13w	3000k	1245	>90	15°	0,85	61248B.13.15.30	61248B.13.15.32
18w	3000k	1775	>90	15°	0,85	61248B.18.15.30	61248B.18.15.32
27w	3000k	2480	>90	15°	0,85	61248B.27.15.30	61248B.27.15.32
33w	3000k	2880	>90	15°	0,85	61248B.33.15.30	61248B.33.15.32
40w	3000k	3320	>90	15°	0,85	61248B.40.15.30	61248B.40.15.32
13w	3000k	1245	>90	20°	0,85	61248B.13.20.30	61248B.13.20.32
18w	3000k	1775	>90	20°	0,85	61248B.18.20.30	61248B.18.20.32
27w	3000k	2480	>90	20°	0,85	61248B.27.20.30	61248B.27.20.32
33w	3000k	2880	>90	20°	0,85	61248B.33.20.30	61248B.33.20.32
40w	3000k	3320	>90	20°	0,85	61248B.40.20.30	61248B.40.20.32
13w	3000k	1245	>90	30°	0,85	61248B.13.30.30	61248B.13.30.32
18w	3000k	1775	>90	30°	0,85	61248B.18.30.30	61248B.18.30.32
27w	3000k	2480	>90	30°	0,85	61248B.27.30.30	61248B.27.30.32
33w	3000k	2880	>90	30°	0,85	61248B.33.30.30	61248B.33.30.32
40w	3000k	3320	>90	30°	0,85	61248B.40.30.30	61248B.40.30.32
13w	3000k	1245	>90	50°	0,85	61248B.13.50.30	61248B.13.50.32
18w	3000k	1775	>90	50°	0,85	61248B.18.50.30	61248B.18.50.32
27w	3000k	2480	>90	50°	0,85	61248B.27.50.30	61248B.27.50.32
33w	3000k	2880	>90	50°	0,85	61248B.33.50.30	61248B.33.50.32
40w	3000k	3320	>90	50°	0,85	61248B.40.50.30	61248B.40.50.32

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

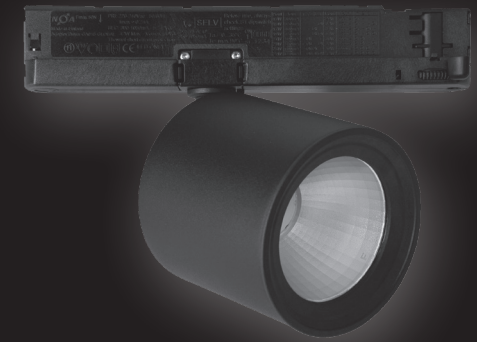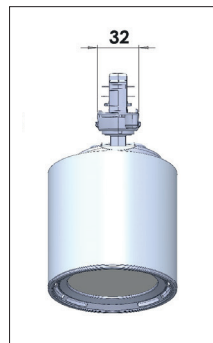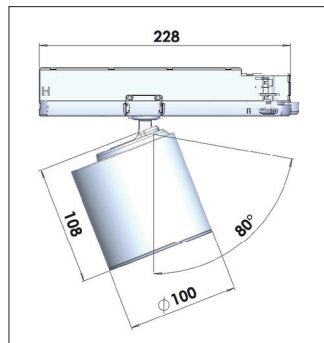


#### Opties:

- 97CRI
- 2700k, 3500k
- Vlees, Brood of Crisp white (2700k, 3000k of 3500k)

#### Options:

- 97CRI
- 2700k, 3500k
- Meat, Bread or Crisp white (2700k, 3000k or 3500k)



**61248B.13.15.30**

13w 3000k 1245lm 15°  
ηLB 84%

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI(Ra)	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali
13w	4000k	1325	>90	15°	0,85	61248B.13.15.40	61248B.13.15.42
18w	4000k	1890	>90	15°	0,85	61248B.18.15.40	61248B.18.15.42
27w	4000k	2645	>90	15°	0,85	61248B.27.15.40	61248B.27.15.42
33w	4000k	3085	>90	15°	0,85	61248B.33.15.40	61248B.33.15.42
40w	4000k	3600	>90	15°	0,85	61248B.40.15.40	61248B.40.15.42
13w	4000k	1325	>90	20°	0,85	61248B.13.20.40	61248B.13.20.42
18w	4000k	1890	>90	20°	0,85	61248B.18.20.40	61248B.18.20.42
27w	4000k	2645	>90	20°	0,85	61248B.27.20.40	61248B.27.20.42
33w	4000k	3085	>90	20°	0,85	61248B.33.20.40	61248B.33.20.42
40w	4000k	3600	>90	20°	0,85	61248B.40.20.40	61248B.40.20.42
13w	4000k	1325	>90	30°	0,85	61248B.13.30.40	61248B.13.30.42
18w	4000k	1890	>90	30°	0,85	61248B.18.30.40	61248B.18.30.42
27w	4000k	2645	>90	30°	0,85	61248B.27.30.40	61248B.27.30.42
33w	4000k	3085	>90	30°	0,85	61248B.33.30.40	61248B.33.30.42
40w	4000k	3600	>90	30°	0,85	61248B.40.30.40	61248B.40.30.42
13w	4000k	1325	>90	50°	0,85	61248B.13.50.40	61248B.13.50.42
18w	4000k	1890	>90	50°	0,85	61248B.18.50.40	61248B.18.50.42
27w	4000k	2645	>90	50°	0,85	61248B.27.50.40	61248B.27.50.42
33w	4000k	3085	>90	50°	0,85	61248B.33.50.40	61248B.33.50.42
40w	4000k	3600	>90	50°	0,85	61248B.40.50.40	61248B.40.50.42

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

**Accessoires/Accessories:****Honingraat / Honey Comb**

The best low glare diffuser (UGR 15) 62148B.Honey

