

Rond inbouw LED armatuur met verdiepte rand gemaakt uit wit gelakt (RAL 9003) aluminium (optioneel zwart RAL 9005 of zilvergrijs RAL 9006). Homogeen verlichte diffuser van dual satin opaal PMMA of Microprisma CRI>80. Gelijke licht intensiteit bij verschillende afmetingen. Geschikt voor toepassing in onder andere winkelcentra, culturele gebouwen of kantoren. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round recessed LED luminaire with deepened trim made of white (RAL 9003) painted aluminium (optionally black RAL 9005 or silver grey RAL 9006). Completely homogeneously illuminated with dual satinised PMMA cover or micro prisma diffuser CRI>80. Suitable for shopping centres, social and cultural amenities or representation areas. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / Micro Prism

Wattage Wattage	Kleur Colour	Diameter (mm) Diameter (mm)	Zaagmaat Cutsite	Lumen* Lumen*	Gewicht (kg) Weight (kg)	Artikelnr. Article number	Dali Dali	Casambi Casambi	Easysense Easysense
16w	3000k	350	330	2080	2,1	26025_M.35.30	26025_M.35.32	26025_M.35.35	26025_M.35.37**
34w	3000k	600	580	4420	4,1	26025_M.60.30	26025_M.60.32	26025_M.60.35	26025_M.60.37
60w	3000k	900	880	7800	5,9	26025_M.90.30	26025_M.90.32	26025_M.90.35	26025_M.90.37
16w	4000k	350	330	2185	2,1	26025_M.35.40	26025_M.35.42	26025_M.35.45	26025_M.35.47**
34w	4000k	600	580	4640	4,1	26025_M.60.40	26025_M.60.42	26025_M.60.45	26025_M.60.47
60w	4000k	900	880	8190	5,9	26025_M.90.40	26025_M.90.42	26025_M.90.45	26025_M.90.47

Opaal / Opal

Wattage Wattage	Kleur Colour	Diameter (mm) Diameter (mm)	Zaagmaat Cutsite	Lumen* Lumen*	Gewicht (kg) Weight (kg)	Artikelnr. Article number	Dali Dali	Casambi Casambi	Easysense Easysense
16w	3000k	350	330	1975	2,1	26025_OP.35.30	26025_OP.35.32	26025_OP.35.35	26025_OP.35.37**
34w	3000k	600	580	4200	4,1	26025_OP.60.30	26025_OP.60.32	26025_OP.60.35	26025_OP.60.37
60w	3000k	900	880	7410	5,9	26025_OP.90.30	26025_OP.90.32	26025_OP.90.35	26025_OP.90.37
16w	4000k	350	330	2075	2,1	26025_OP.35.40	26025_OP.35.42	26025_OP.35.45	26025_OP.35.47**
34w	4000k	600	580	4410	4,1	26025_OP.60.40	26025_OP.60.42	26025_OP.60.45	26025_OP.60.47
60w	4000k	900	880	7780	5,9	26025_OP.90.40	26025_OP.90.42	26025_OP.90.45	26025_OP.90.47

_ W=wit / B=zwart / G=grijs

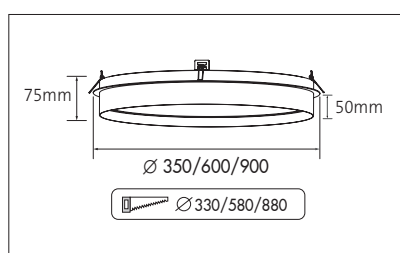
_ W=white / B=black / G=grey

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

** EasySense diameter 400mm


** EasySense diameter 400mm

**Opties:**

- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

Options:

- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Different RAL color

**26025_M.35.30**16W 3000K 2080lm
ηLB 100%