



Slank pendel armatuur vervaardigd uit geextrudeerd aluminium in zwart (RAL 9005). Voorzien van goudkleurige reflector met prismatisch glazen afscherming voor extra comfort en warme uitstraling. Door de verdiepte spiegel heeft het armatuur een zeer lage verblinding (UGR<14). Hierdoor zeer geschikt als accent en sfeerverlichting in restaurants, hotels en winkels. Wordt geleverd inclusief interne driver en plafondrozet. Directe aansluiting op netspanning. Inclusief 1,5 meter transparant snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Slim suspended luminaire made of extruded aluminium in black (RAL 9005). With gold colour reflector and prismatic glass diffuser for extra comfort and warm atmosphere. Deep recessed reflector with low glare (UGR<14). Very suitable as accent lighting in restaurants, hotels and shops. Delivered including internal driver and ceiling box with connector block. Direct connection to mains. Delivered including 1,5 meter cable. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Graden Degree	kg kg	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali/Touch dim Dali/Touch dim	Fase dim Phase dim
9w	3000k	1150	10º	1	61240B.09.10.30	61240B.09.10.31	61240B.09.10.32	61240B.09.10.33
13w	3000k	1560	10º	1	61240B.13.10.30	61240B.13.10.31	61240B.13.10.32	61240B.13.10.33
19w	3000k	2135	10º	1	61240B.19.10.30	61240B.19.10.31	61240B.19.10.32	61240B.19.10.33
28w	3000k	2780	10º	1	61240B.28.10.30	61240B.28.10.31	61240B.28.10.32	61240B.28.10.33
9w	3000k	1125	20º	1	61240B.09.20.30	61240B.09.20.31	61240B.09.20.32	61240B.09.20.33
13w	3000k	1525	20º	1	61240B.13.20.30	61240B.13.20.31	61240B.13.20.32	61240B.13.20.33
19w	3000k	2085	20º	1	61240B.19.20.30	61240B.19.20.31	61240B.19.20.32	61240B.19.20.33
28w	3000k	2715	20º	1	61240B.28.20.30	61240B.28.20.31	61240B.28.20.32	61240B.28.20.33
9w	3000k	1050	30º	1	61240B.09.30.30	61240B.09.30.31	61240B.09.30.32	61240B.09.30.33
13w	3000k	1430	30º	1	61240B.13.30.30	61240B.13.30.31	61240B.13.30.32	61240B.13.30.33
19w	3000k	1950	30º	1	61240B.19.30.30	61240B.19.30.31	61240B.19.30.32	61240B.19.30.33
28w	3000k	2540	30º	1	61240B.28.30.30	61240B.28.30.31	61240B.28.30.32	61240B.28.30.33
9w	4000k	1210	10º	1	61240B.09.10.40	61240B.09.10.41	61240B.09.10.42	61240B.09.10.43
13w	4000k	1640	10º	1	61240B.13.10.40	61240B.13.10.41	61240B.13.10.42	61240B.13.10.43
19w	4000k	2235	10º	1	61240B.19.10.40	61240B.19.10.41	61240B.19.10.42	61240B.19.10.43
28w	4000k	2925	10º	1	61240B.28.10.40	61240B.28.10.41	61240B.28.10.42	61240B.28.10.43
9w	4000k	1180	20º	1	61240B.09.20.40	61240B.09.20.41	61240B.09.20.42	61240B.09.20.43
13w	4000k	1600	20º	1	61240B.13.20.40	61240B.13.20.41	61240B.13.20.42	61240B.13.20.43
19w	4000k	2180	20º	1	61240B.19.20.40	61240B.19.20.41	61240B.19.20.42	61240B.19.20.43
28w	4000k	2850	20º	1	61240B.28.20.40	61240B.28.20.41	61240B.28.20.42	61240B.28.20.43
9w	4000k	1110	30º	1	61240B.09.30.40	61240B.09.30.41	61240B.09.30.42	61240B.09.30.43
13w	4000k	1500	30º	1	61240B.13.30.40	61240B.13.30.41	61240B.13.30.42	61240B.13.30.43
19w	4000k	2040	30º	1	61240B.19.30.40	61240B.19.30.41	61240B.19.30.42	61240B.19.30.43
28w	4000k	2670	30º	1	61240B.28.30.40	61240B.28.30.41	61240B.28.30.42	61240B.28.30.43


* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

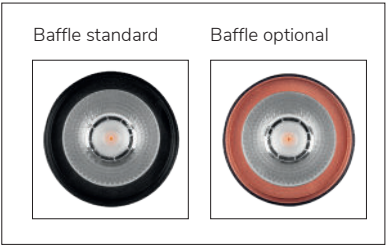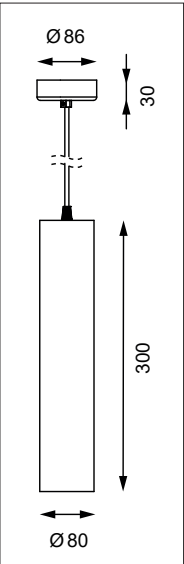

Accessoires:
- 90CRI of 97CRI

Accessories:
- 90CRI or 97CRI



61240B.09.10.30
9w 3000k 1150lm
ηLB 81%