Truss UP/DOWN

PF>0,9 IP20 CE RoHS

Driehoekig pendel LED armatuur met minimalistisch design en directe/indirecte lichtbundel. Behuizing gemaakt van gebogen aluminium profiel. Verkrijgbaar in wit gelakt (RAL 9003) of zwart (RAl 9005). Inclusief plafondrozet en 3 staalkabels (1m) met snoer (3,5m). Geschikt voor toepassing in onder andere winkelcentra, hotels en kantoren. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Triangular suspended LED luminaire with minimalistic design and direct/indirect beam angle. Housing made of aluminium profile painted in white (RAL 9003) or black (RAL 9005). Supplied including ceiling cap and 3 steelcables (1m) and wire (3,5m). Suitable for shopping centres, hotels and offices. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / *Micro Prism*

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Afmeting (mm)** *Size (mm)*	**H (mm)** *H (mm)*	**B (mm)** *W (mm)*	**Gewicht (kg)** *Weight (kg)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
60w+16w	3000k	7850	>80	900x900x900	82	80	5,4	27121MP_.90030	27121MP_.90032
80w+22w	3000k	10.400	>80	1200x1200x1200	82	80	7,2	27121MP_.120030	27121MP_.120032
70w+20w	3000k	9450	>80	930x640x1140	82	80	7,2	27121MP_.93030	27121MP_.93032
95w+29w	3000k	13.020	>80	1315x830x1630	82	80	8,6	27121MP_.131530	27121MP_.131532
115w+39w	3000k	16.180	>80	1615x1025x2040	82	80	8,6	27121MP_.161530	27121MP_.161532
60w+16w	4000k	8245	>80	900x900x900	82	80	5,4	27121MP_.90040	27121MP_.90042
80w+22w	4000k	10.920	>80	1200x1200x1200	82	80	7,2	27121MP_.120040	27121MP_.120042
70w+20w	4000k	9925	>80	930x640x1140	82	80	7,2	27121MP_.93040	27121MP_.93042
95w+29w	4000k	13.670	>80	1315x830x1630	82	80	8,6	27121MP_.131540	27121MP_.131542
115w+39w	4000k	16.990	>80	1615x1025x2040	82	80	8,6	27121MP_.161540	27121MP_.161542

Opaal / *Opal*


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Afmeting (mm)** *Size (mm)*	**H (mm)** *H (mm)*	**B (mm)** *W (mm)*	**Gewicht (kg)** *Weight (kg)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
60w+16w	3000k	7460	>80	900x900x900	82	80	5,4	27121OP_.90030	27121OP_.90032
80w+22w	3000k	9880	>80	1200x1200x1200	82	80	7,2	27121OP_.120030	27121OP_.120032
70w+20w	3000k	8980	>80	930x640x1140	82	80	7,2	27121OP_.93030	27121OP_.93032
95w+29w	3000k	12.370	>80	1315x830x1630	82	80	8,6	27121OP_.131530	27121OP_.131532
115w+39w	3000k	15.370	>80	1615x1025x2040	82	80	8,6	27121OP_.161530	27121OP_.161532
60w+16w	4000k	7835	>80	900x900x900	82	80	5,4	27121OP_.90040	27121OP_.90042
80w+22w	4000k	10.375	>80	1200x1200x1200	82	80	7,2	27121OP_.120040	27121OP_.120042
70w+20w	4000k	9430	>80	930x640x1140	82	80	7,2	27121OP_.93040	27121OP_.93042
95w+29w	4000k	12.990	>80	1315x830x1630	82	80	8,6	27121OP_.131540	27121OP_.131542
115w+39w	4000k	16.140	>80	1615x1025x2040	82	80	8,6	27121OP_.161540	27121OP_.16152


* Lichtstroom van armatuur, tolerantie van +/- 10%


_ W=wit / B=zwart

* *Luminaire luminous flux, tolerance of +/- 10%*

_ W=white / B=black

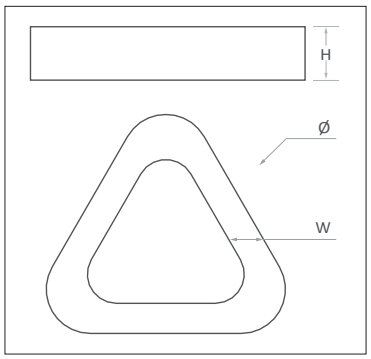


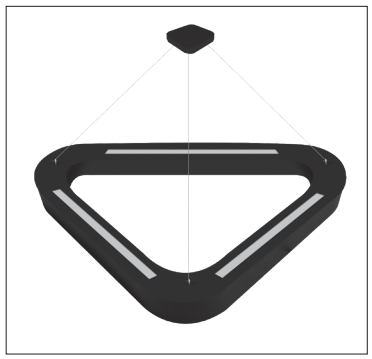

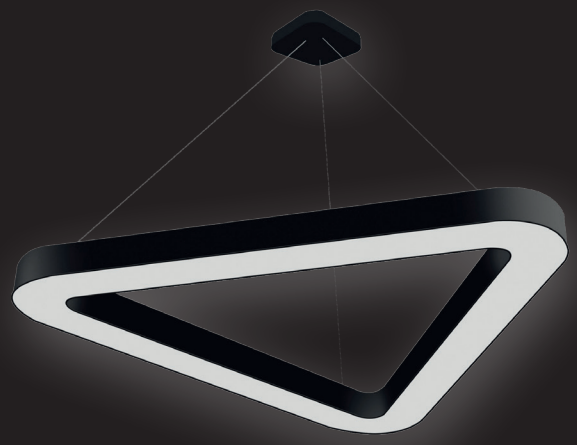

Opties:
- Indirecte lichtbundel RGB dimbaar 0-100%

Options:
- *Uplight RGB dimming 0-100%*



27121.MP_.90030
60w+16w 3000k 7850lm
ηLB 100%

melis lighting