

Driehoekig pendel LED armatuur met minimalistisch design en directe/indirecte lichtbundel. Behuizing gemaakt van gebogen aluminium profiel. Verkrijgbaar in wit gelakt (RAL 9003) of zwart (RAL 9005). Inclusief plafondrozet en 3 staalkabels (1m) met snoer (3,5m). Geschikt voor toepassing in onder andere winkelcentra, hotels en kantoren. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Triangular suspended LED luminaire with minimalistic design and direct/indirect beam angle. Housing made of aluminium profile painted in white (RAL 9003) or black (RAL 9005). Supplied including ceiling cap and 3 steelcables (1m) and wire (3,5m). Suitable for shopping centres, hotels and offices. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / Micro Prism

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Afmeting (mm) Size (mm)	H (mm) H (mm)	B (mm) W (mm)	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali
60w+16w	3000k	7850	>80	900x900x900	82	80	5,4	27121MP_90030	27121MP_90032
80w+22w	3000k	10.400	>80	1200x1200x1200	82	80	7,2	27121MP_120030	27121MP_120032
70w+20w	3000k	9450	>80	930x640x1140	82	80	7,2	27121MP_93030	27121MP_93032
95w+29w	3000k	13.020	>80	1315x830x1630	82	80	8,6	27121MP_131530	27121MP_131532
115w+39w	3000k	16.180	>80	1615x1025x2040	82	80	8,6	27121MP_161530	27121MP_161532
60w+16w	4000k	8245	>80	900x900x900	82	80	5,4	27121MP_90040	27121MP_90042
80w+22w	4000k	10.920	>80	1200x1200x1200	82	80	7,2	27121MP_120040	27121MP_120042
70w+20w	4000k	9925	>80	930x640x1140	82	80	7,2	27121MP_93040	27121MP_93042
95w+29w	4000k	13.670	>80	1315x830x1630	82	80	8,6	27121MP_131540	27121MP_131542
115w+39w	4000k	16.990	>80	1615x1025x2040	82	80	8,6	27121MP_161540	27121MP_161542

Opaal / Opal




Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Afmeting (mm) Size (mm)	H (mm) H (mm)	B (mm) W (mm)	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali
60w+16w	3000k	7460	>80	900x900x900	82	80	5,4	27121OP_90030	27121OP_90032
80w+22w	3000k	9880	>80	1200x1200x1200	82	80	7,2	27121OP_120030	27121OP_120032
70w+20w	3000k	8980	>80	930x640x1140	82	80	7,2	27121OP_93030	27121OP_93032
95w+29w	3000k	12.370	>80	1315x830x1630	82	80	8,6	27121OP_131530	27121OP_131532
115w+39w	3000k	15.370	>80	1615x1025x2040	82	80	8,6	27121OP_161530	27121OP_161532
60w+16w	4000k	7835	>80	900x900x900	82	80	5,4	27121OP_90040	27121OP_90042
80w+22w	4000k	10.375	>80	1200x1200x1200	82	80	7,2	27121OP_120040	27121OP_120042
70w+20w	4000k	9430	>80	930x640x1140	82	80	7,2	27121OP_93040	27121OP_93042
95w+29w	4000k	12.990	>80	1315x830x1630	82	80	8,6	27121OP_131540	27121OP_131542
115w+39w	4000k	16.140	>80	1615x1025x2040	82	80	8,6	27121OP_161540	27121OP_16152

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

_ W=wit / B=zwart

_ W=white / B=black

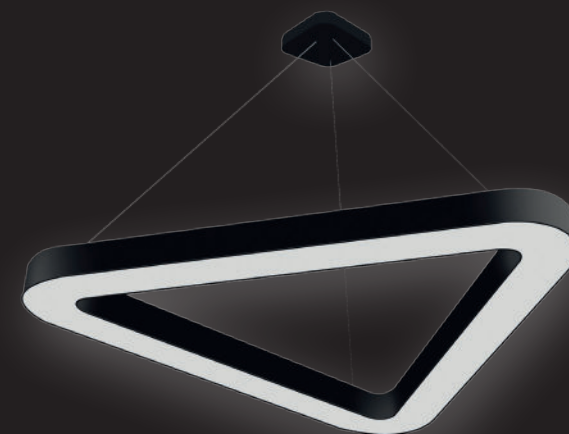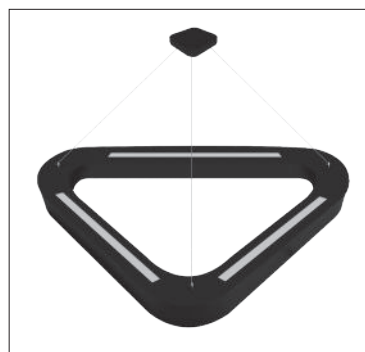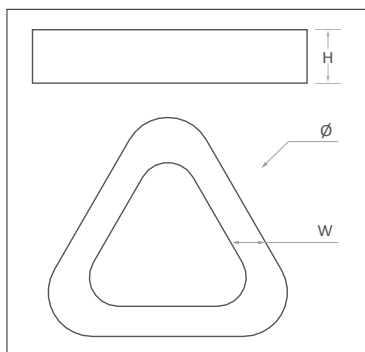


Opties:

- Indirecte lichtbundel RGB dimbaar 0-100%

Options:

- Uplight RGB dimming 0-100%



27121.MP_90030

60w+16w 3000k 7850lm
ηLB 100%