




DALI LED inlegarmatuur met standaard afmetingen voor systeemplafonds of gipsplafonds\*\*, met hoog rendement Tuneable White LED technologie (>125lm/w). Tunable white - dynamisch mengen van lichtkleur tussen 2700K en 6500K. Vervaardigd uit witgelakt (RAL 9003) plaatstaal. Verkrijgbaar met opalen (UGR<22), micro prisma (UGR<19) of micro prisma comfort (UGR<19) diffuser. Hierdoor zeer goed toepasbaar in rusthuizen maar ook kantoren, klaslokalen, en andere werkkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Garantie 5 jaar.

Recessed DALI LED luminaire with standard measurements for suspended ceilings or plasterboard ceilings\*\*, with high efficiency Tuneable white technology (>125lm/w). Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500k. Housing made of white painted (RAL 9003) sheet metal. With opal (UGR<22) micro prism (UGR<19) or micro prism comfort diffuser (UGR<19). Therefore very suitable for retirement homes, offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (60.000 hours L90B10). Warranty 5 years.

Wattage Watt	Kleur Colour	Lumen* Lumen*	Diffuser Diffusor	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Breedte (mm) Width (mm)	Hoogte (mm) Height (mm)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.
35w	2700k - 6500k	4370	Opal	>80	595	595	62	2,5	1/3	29521OP.B35.TW
35w	2700k - 6500k	4160	Micro	>80	595	595	62	2,5	1/3	29521M.B35.TW
35w	2700k - 6500k	3870	Mico Comfort	>80	595	595	62	2,5	1/3	29521MC.B35.TW
57w	2700k - 6500k	6600	Opal	>80	595	595	62	2,5	1/3	29521OP.B57.TW
57w	2700k - 6500k	6925	Micro	>80	595	595	62	2,5	1/3	29521M.B57.TW
57w	2700k - 6500k	5835	Mico Comfort	>80	595	595	62	2,5	1/3	29521MC.B57.TW



\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

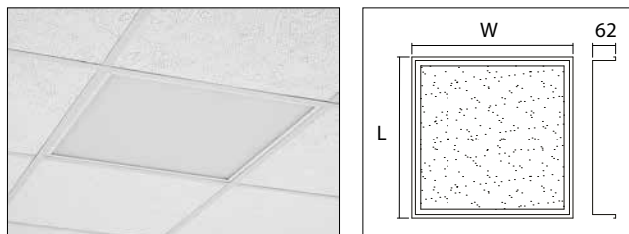

#### \*\*Gipsplafond clips / Plasterboard ceiling clips

29521.CLIPS

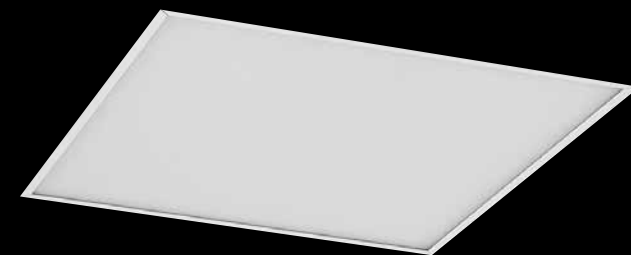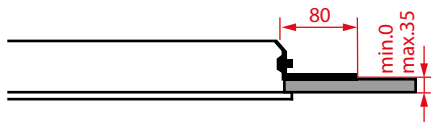


#### Opties:

- GST18i3<sup>®</sup> connector + BST14i2 connector
- GST18i5<sup>®</sup> connector
- Andere RAL kleur

#### Optional:

- GST18i3<sup>®</sup> connector + BST14i2 connector
- GST18i5<sup>®</sup> connector
- Different RAL colour



29521OP.B35.TW

35w 2700k-6500k 4370lm  
ηLB 100%