Vesta

PF>0,95 IP40

INBOUW ARMATUREN RECESSED LUMINAIRES


Asymmetrisch inleg LED armatuur met super efficiente LED (>140lm/w) technologie. Vervaardigd uit geëxtrudeerd wit gelakt (RAL 9003) aluminium. Modulair opgebouwd met zeer hoogwaardige afwerking en hoog rendement. Voorzien van dual satin diffuser voor comfortabel licht met gelijkmatige verdeling over het verticale vlak. Door unieke design tot 3x efficiënter dan T5. Toepasbaar als wall washer voor het aanlichten van schappen en wanden in winkels of muren in gangen. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Asymmetrical recesssed LED luminaire with super efficient LED (>140lm/w) technology. Housing made of white (RAL 9003) painted extruded aluminium. Modular design with very high quality finish and high efficiency. Features dual satin diffuser for comfortable light with even distribution on the vertical plane. By unique design up to 3x more efficient than T5. Can be used as wall washer for the lighting shelves and walls in stores or walls in hallways. Low maintenance and high expected life span (100.000 hours L80B10). Colour stability, Mac Adam < 3. Five-year warranty.

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**Breedte (mm)** *Width (mm)*	**Lengte (mm)** *Length (mm)*	**Hoogte (mm)** *Height (mm)*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
11w	3000k	1570	>80	150	590	62	1	1/3	61089.11.30	61089.11.32
17w	3000k	2270	>80	150	590	62	1	1/3	61089.17.30	61089.17.32
22w	3000k	3140	>80	150	1190	62	2	1/3	61090.22.30	61090.22.32
26w	3000k	3140	>80	150	590	62	1	1/3	61089.26.30	61089.26.32
34w	3000k	4540	>80	150	1190	62	2	1/3	61090.34.30	61090.34.32
52w	3000k	6275	>80	150	1190	62	2	1/3	61090.52.30	61090.52.32
11w	4000k	1650	>80	150	590	62	1	1/3	61089.11.40	61089.11.42
17w	4000k	2390	>80	150	590	62	1	1/3	61089.17.40	61089.17.42
22w	4000k	3300	>80	150	1190	62	2	1/3	61090.22.40	61090.22.42
26w	4000k	3300	>80	150	590	62	1	1/3	61089.26.40	61089.26.42
34w	4000k	4770	>80	150	1190	62	2	1/3	61090.34.40	61090.34.42
52w	4000k	6590	>80	150	1190	62	2	1/3	61090.52.40	61090.52.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

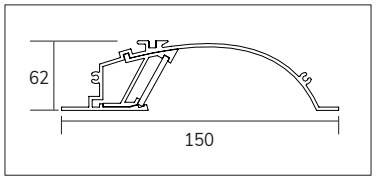

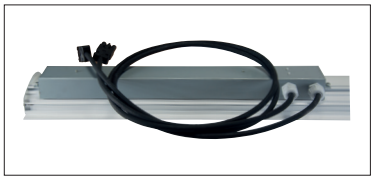






Opties:
- M600 plafondmaat
- CRI>90
- Kabels
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

Optional:
- *M600 ceiling size*
- *CRI>90*
- *Cables*
- *GST18i3® connector + BST14i2 connector*
- *GST18i5® connector*
- *Different RAL colour*



61090.34.30
34w 3000k 4540lm
ηLB 100%

melis lighting