


Extreem lage inbouw LED downlight (26mm) met wit gelakte aluminium behuizing (RAL 9003). Zeer hoge kwaliteit LED's met hoge kleurweergave (CRI>80). Speciale combinatie PMMA diffusers voor egale lichtverdeling met 115° uitstralingshoek. Standaard verkrijgbaar in warm wit (3000k) en neutraal wit (4000k). Zeer goed toepasbaar in hallen, trappenhuisen en ruimtes met weinig inbouw ruimte. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <2. Vijf jaar garantie.

Extremely shallow recessed LED downlight (26mm) white painted aluminium housing (RAL 9003). Very high quality LEDs with high colour rendering (CRI>80). Due to a special combination of PMMA diffusers the light distributions is very even and has a 115° beam angle. Standard available in warm white (3000k) and neutral white (4000k). Very suitable in toilets, corridors, stairways and rooms with limited build-in height. Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L80B10). Color stability, Mac Adam <2. Fast and easy mounting with springs. Five years warranty.

Wattage Wattage	Kleur Colour	Lumen* Lumen*	Diameter (mm) Diameter (mm)	Zaagmaat Cutsize	Amperage (mA) Amperage (mA)	Gewicht (kg) Weight (kg)	Artikelnr. Article number	Dimbaar (1-10v) Dimmable (1-10v)	Dali Dali
4w	3000k	350	121	108	200	0,3	CIRN121S.3	CIRN121S.3.1	CIRN121S.3.2
8w	3000k	590	121	108	300	0,3	CIRN121H.3	CIRN121H.3.1	CIRN121H.3.2
12w	3000k	981	173	160	250	0,5	CIRN173S.3	CIRN173S.3.1	CIRN173S.3.2
17w	3000k	1236	173	160	350	0,5	CIRN173H.3	CIRN173H.3.1	CIRN173H.3.2
14w	3000k	1125	224	210	350	0,8	CIRN224S.3	CIRN224S.3.1	CIRN224S.3.2
20w	3000k	1446	224	210	500	0,8	CIRN224H.3	CIRN224H.3.1	CIRN224H.3.2
4w	4000k	385	121	108	200	0,3	CIRN121S.4	CIRN121S.4.1	CIRN121S.4.2
8w	4000k	649	121	108	300	0,3	CIRN121H.4	CIRN121H.4.1	CIRN121H.4.2
12w	4000k	1090	173	160	250	0,5	CIRN173S.4	CIRN173S.4.1	CIRN173S.4.2
17w	4000k	1373	173	160	350	0,5	CIRN173H.4	CIRN173H.4.1	CIRN173H.4.2
14w	4000k	1250	224	210	350	0,8	CIRN224S.4	CIRN224S.4.1	CIRN224S.4.2
20w	4000k	1607	224	210	500	0,8	CIRN224H.4	CIRN224H.4.1	CIRN224H.4.2
15w	4000k	1660	300	285	350	1,0	CIRN300S.4	CIRN300S.4.1	CIRN300S.4.2
21w	4000k	2092	300	285	500	1,0	CIRN300H.4	CIRN300H.4.1	CIRN300H.4.2

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

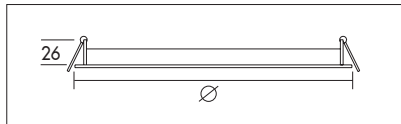

Accessoires:

- Gemonteerde 1,5 meter snoer + stekker (2-polig)
CIR_____-M1,5
- Gemonteerde 0,5 meter snoer + GST18i3® male
CIR_____-GST
- Gemonteerde 2x0,5 meter snoer + GST18i3® male
BST14i2 CIR_____-GSTD

Opties:


- 2700k or 6000k op aanvraag

Accessories:

- Assembled 1,5 meter cable + plug (2-pole)
CIR_____-M1,5
- Assembled 0,5 meter cable + GST18i3® male
CIR_____-GST
- Assembled 2x0,5 meter cable + GST18i3® male +
BST14i2 CIR_____-GSTD

Options:

- 2700k or 6000k available on request



CIRN121S.3
4W 3000K 350lm
ηLB 100%