

Slagvast portiek armatuur met opalen of heldere afscherming. Poly carbonaat behuizing. Stof- en waterdicht. Zeer snelle terugverdiertijd ten opzichte van 8w TL-mini armaturen (2-6 maanden). Door de lange levensduur van de LED onderhoudsvrij. Alle elektronische componenten in de behuizing. Invoer voeding via achterzijde van het armatuur. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.



Impact proof porch luminaire with opal or clear diffuser. Poly carbonate housing. Dust and waterproof. Fast return on investment in comparison to TL-Mini 8w luminaires (2-6 months). All electronic components inside the luminaire. Connection through the back of the luminaire. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.



Wattage Wattage	Opaal Opal	Helder Clear	Kleur Colour	Lumen* Lumen*	mA mA	Montage gaten Mounting holes	Gewicht (kg) Weight (kg)	Artikelnr. Article number	Nood Emergency
4w	x		3000k	300	350	268	0,7	69919-O-3S	69919-O-3S.3
4w	x		4000k	315	350	268	0,7	69919-O-4S	69919-O-4S.3
4w	x		6000k	330	350	268	0,7	69919-O-6S	69919-O-6S.3
9w	x		3000k	600	700	268	0,7	69919-O-3	69919-O-3.3
9w	x		4000k	630	700	268	0,7	69919-O-4	69919-O-4.3
9w	x		6000k	665	700	268	0,7	69919-O-6	69919-O-6.3
4w		x	3000k	500	350	268	0,7	69919-H-3S	69919-H-3S.3
4w		x	4000k	520	350	268	0,7	69919-H-4S	69919-H-4S.3
4w		x	6000k	570	350	268	0,7	69919-H-6S	69919-H-6S.3
9w		x	3000K	1000	700	268	0,7	69919-H-3	69919-H-3.3
9w		x	4000k	1040	700	268	0,7	69919-H-4	69919-H-4.3
9w		x	6000k	1100	700	268	0,7	69919-H-6	69919-H-6.3

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

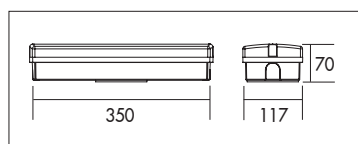

69919-H-3
9w 3000K 1000lm
ηLB 55%