

## Soft Led RGB W



LED STRIPS/PROFIELEN

LED STRIPS/FILES


Professionele hoge kwaliteit 24VDC RGB W soft strip met hoge lumen per watt verhouding, voor inbouw in koven, kasten, armaturen, etc. Hoogrendement 5050 RGB LED op flexibele strip. IP20 en IP65 soft strip is aan de achterzijde voorzien van 3M tape (standaard 5 meter rol). De strip is aan beide zijden voorzien van 10cm snoer. Voor maximale lumen output tweezijdig voeden. IP65 variant is voorzien van een siliconen huls. Onderhoudsarm en hoge levensduurverwachting 50.000 uur bij Ta 25°C. Vijf jaar garantie.

Professional high quality 24VDC RGB W soft strip with high lumen per watt ratio, mainly used for cove lighting, indoor decoration, backlighting and edge lighting. High efficiency 5050 RGB LED's on a flexible strip. The IP20 and IP65 soft strip come with 3M tape on the back (standard 5 meter reel). Includes 10cm wire on both ends of the strip. For maximum lumen output and lifetime it is advised to power the strip on both ends. The IP65 soft strip comes with a silicon sleeve. Lifetime expectancy 50.000 at Ta 25°C. Five years warranty.

LED's LED's	Voltage (DC) Voltage (DC)	Watt (p/m) Watt (p/m)	Kleur Colour	Lengte (m) Length (m)	Breedte (mm) Width (mm)	Min. lengte min. length	Lumen* (p/m) Lumen* (p/m)	Artikelnr. IP20/IP65 Article number IP20/IP65
60	24v	19,2	3000K	5	12	100mm	R:98 G:362 B:90 W:356	27106.19.30.20
60	24v	19,2	4000K	5	12	100mm	R:103 G:380 B:94 W:374	27106.19.40.20
60	24v	19,2	3000K	5	12	100mm	R:98 G:362 B:90 W:356	27106.19.30.65
60	24v	19,2	4000K	5	12	100mm	R:103 G:380 B:94 W:374	27106.19.40.65

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

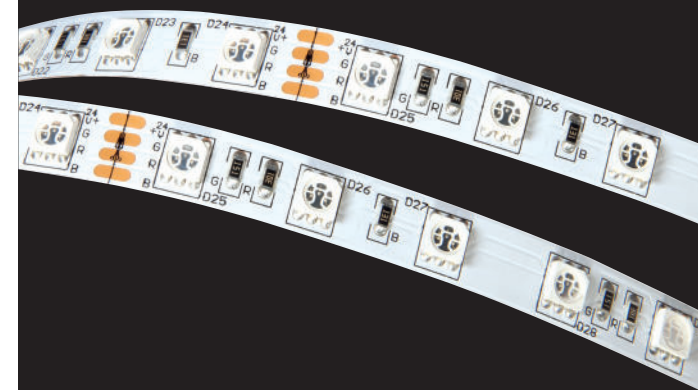

melis lighting